
abeba

OCCUPATIONAL AND SAFETY SHOES

WE ♥ SAFETY

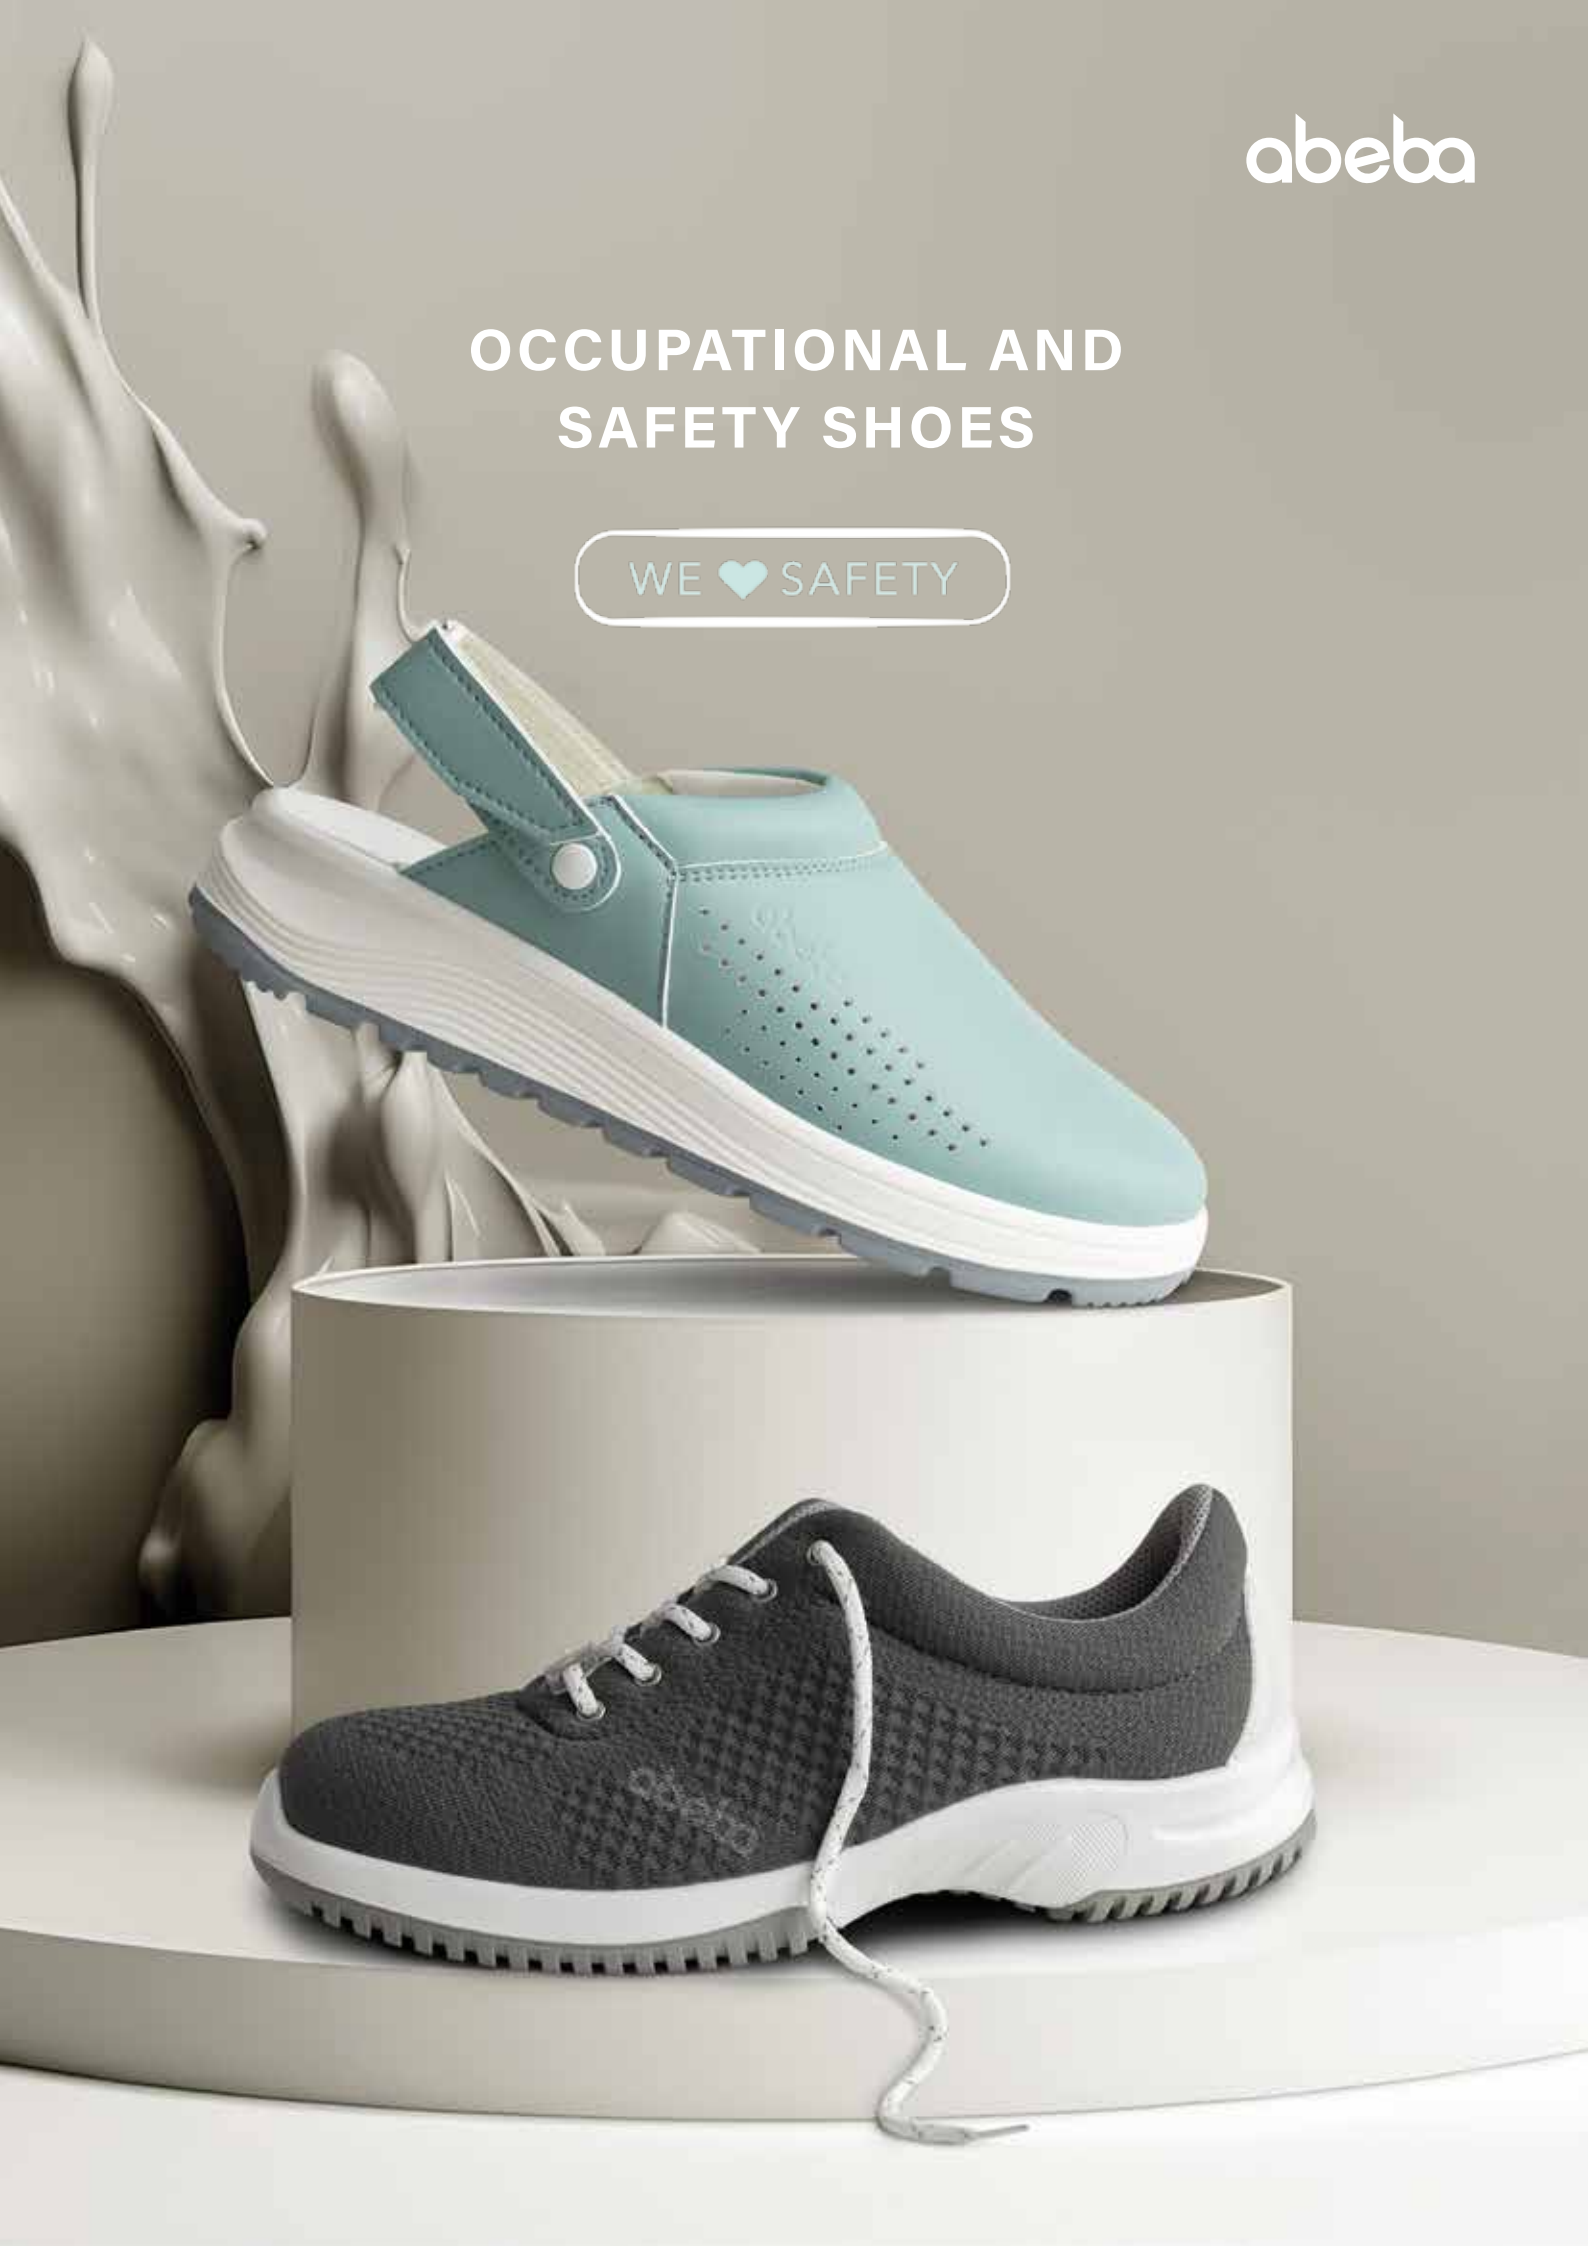

Contents

General information

004 ABOUT US
006 WORLD OF INDUSTRIES
008 PICTOGRAMS
009 PROPERTIES (MATERIALS, SAFETY CAPS, KITCHENS AND FOOD)
012 ESD
014 TECHNICAL INFORMATION
106 SEARCH REGISTER

Occupational shoes

Clogs

018 ACTIVE
024 THE ORIGINAL + THE ORIGINAL PLUS
026 DYNAMIC
032 EASY 2.0
034 RUBBER
038 ARROW
040 NATURE
044 AUTOCLAVABLE

Shoes

046 AIR CUSHION
048 UNI6
054 BUSINESS

Clogs & shoes

056 X-LIGHT
062 REFLEXOR
066 CLEANROOM

Safety shoes

Clogs & shoes

070 CLASSIC
072 X-LIGHT

Clogs, shoes & boots

080 ANATOM
085 STATIC CONTROL

Shoes

086 UNI6
092 BUSINESS

Shoes & boots

094 FOOD TRAX
102 BASIC

Accessories

104 INLAYS
105 LACES SET

Imprint

Publisher:
abeba Spezialschuh-Ausstatter GmbH · Schlackenbergstraße 5 · D-66386 St. Ingbert
Tel: +49 6894 3103-100 · Fax: +49 6894 3074 · E-Mail: abeba@abeba.de
www.b2b.abeba.com · Webshop: www.abeba.com

Photography:
Fandel Foto & Design · Adobe Stock

Subject to model and colour deviations, technical modifications, replacement or subsequent delivery. Printed on environmentally-friendly paper.

The abeba group

The abeba group specialises in the manufacture and distribution of safety and occupational footwear as well as military, rescue service and police footwear. Founded 80 years ago in Saarland, they have been delivering their products worldwide for decades. Thanks to continuous, healthy growth, the brands **abeba**, **Protektor** and **Grom** now make up the abeba group.

The abeba brand

We, the abeba brand, have a mission to make special footwear that is used wherever comfort, safety and lightness are most important: In the fields of medicine, gastronomy, HoReCa and the electronics industry. We design and manufacture solutions that provide protection, comfort and increase productivity. And the best thing is: With our range, we manage to cover a number of sectors.
In the production of our shoes, we rely on the latest technologies and use lightweight and dirt-repellent materials. An experienced team of designers and constructors is responsible for the development and extensive testing of our series. This allows us to guarantee the best possible quality and technology for many areas of use.

INDUSTRIES

Did you know?

With our range of shoes, we cover a number of sectors.

- **Medical**
- **Gastronomy**
- **Pharmacy**
- **Bakery**
- **Laboratory**
- **Food industry**
- **ESD**
- **Electronic / semi-conductors**
- **Meat production / butchery / slaughterhouse**
- **Light industry**

Here is an example for a hospital



Medical area

- OP
- Wards
- Rescue service
- Pathology
- Laboratory


Non-medical area

- Cleaning staff
- Kitchen / canteen / service
- Administration
- Janitor service
- Laundry

And the best thing is:

Our shoes meet all requirements of a certified occupational shoe.
This gives all staff members the footwear they need.

All from a single source.

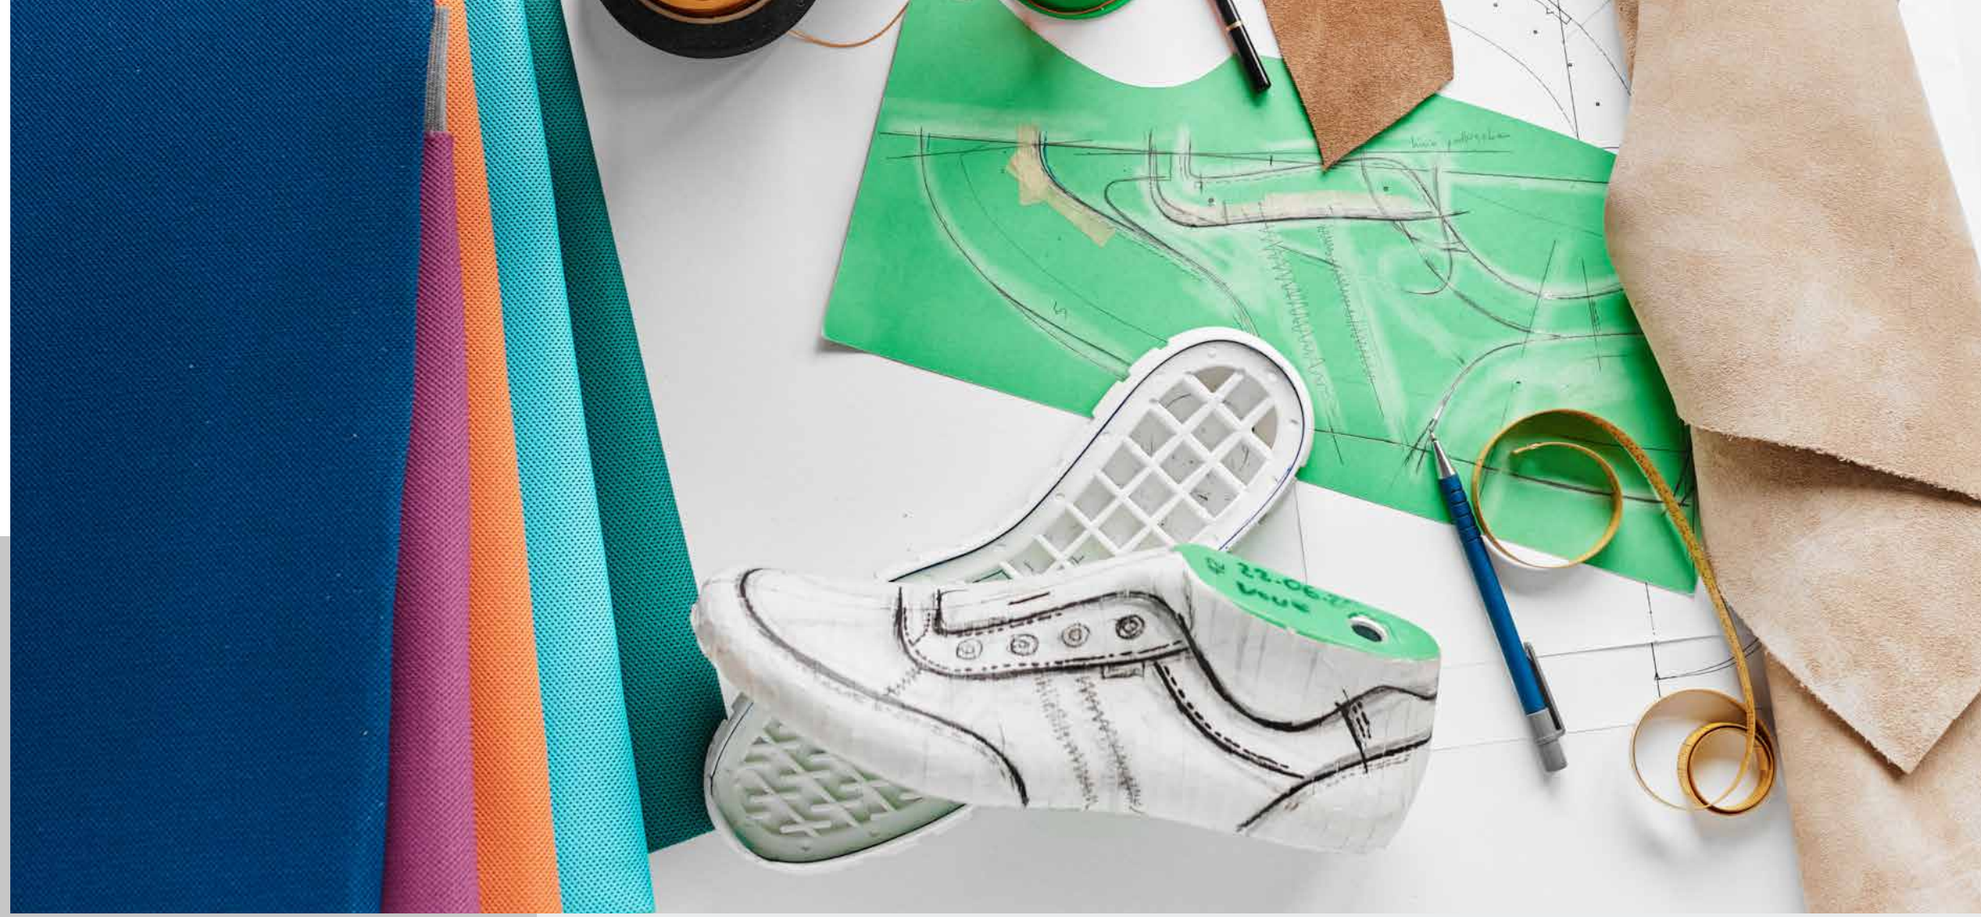

PICTOGRAMS

- 01 LABELLING ACCORDING TO THE STANDARD
- KITCHEN SAFE
- REPLACABLE INLAY
- DGUV 112-191 ORTHOPAEDIC INLAYS
- BREATHABLE TEXTILE
- COMP COMPOSITE SAFETY CAP
- STEEL STEEL SAFETY CAP
- DAMPING
- PENETRATION RESISTANCE MIDSOLE
- 30° WASHABLE AT 30°C
- ESD ESD
- 60° WASHABLE AT 60°C
- 135° AUTOCLAVE SAFE
- METAL FREE METAL FREE
- HACCP HACCP-COMPLIANT
- SUITABLE FOR SERVICE AREAS
- RAISED SOLE

MATERIALS

Microfibre inner lining

This material is a new breathable high-tech microfibre. As an inner lining, it can absorb many times its own weight in moisture and therefore ensures an optimal climate and dryness in the shoe:

▪ Absorbs moisture and removes it ▪ breathable - Anti-microbial - Odour-inhibiting ▪ Temperature-regulating ▪ CO_2 neutral production ▪ Pollutant-free▪ Odour neutral and tear-proof

The microfibre inner lining in **abeba** products is certified in accordance with STANDARD 100 by OEKO-TEX® - an extensive and independent testing and certification system. In the process, the components of the tested products are examined for pollutants of various kinds, often beyond the legal requirements.

Qmicro

Qmicro is an innovative high-tech material that is particularly water-repellent whilst also being breathable, therefore even surpassing the properties of hydrophobised leather. It is washable up to 30°C without shrinking and is antibacterial. This means that Qmicro is particularly suitable for use in areas with complex hygiene requirements. In addition, it can be equipped with various treatments. Due to its special structure, it is particularly light and supple, but at the same time very tear-resistant and durable. Visually, Qmicro replicates leather, which is proof of the high quality of its texture



SAFETY TOE CAPS

Composite cap

- Certification according to DIN EN 12568 outside the shoe (200 Joules)
- Certification according to EN ISO 20345 inside the shoe (200 Joules)
- Thermoplastic polyamide, extremely impact resistant and highly elastic.
- High-strength mono-material, metal-free and approx. 40 % lighter than steel

Steel toe cap


- Certification according to DIN EN 12568 outside the shoe (200 Joules)
- Certification according to EN ISO 20345 inside the shoe (200 Joules)
- High strength material ,extremely impact resistant

KITCHENS AND FOOD

HACCP

Hazard Analysis Critical Control Points is a testing system based on risk analysis. This allows significant health hazards from food to be identified, assessed and eliminated. Especially in the production, treatment and processing of food, all influences that could possibly lead to human illness when consumed must be prevented in advance.
Through this quality assurance, we guarantee the exclusion of materials that are susceptible to accumulations of bacteria. Ask our trained staff as well as our specialist dealers about the right footwear for your area of use.

Please note our microfibre models, which are marked in the catalogue with A-micro as well as the HACCP icon.

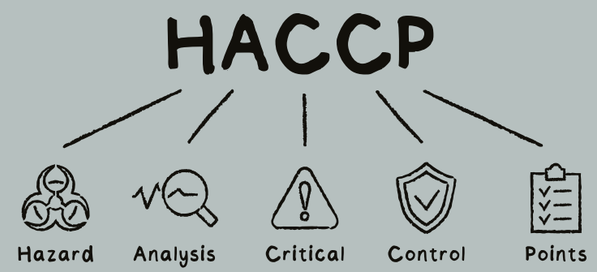

1. Hazard analysis
2. Definition of CCPs
3. Determination of limits for the CPPs
4. Specification of a monitoring system
5. Specification of corrective measures if a limit is exceeded
6. Review of the system (verification)
7. Documentation

DGUV 110-002 (BGR 111)

The guidelines for footwear in kitchens are strict and are defined by the German statutory accident insurance in DGUV Rule 110-002 (previously: BGR 111). Accordingly, a shoe is particularly suitable for the kitchen if it features the following:

- Guarantees a sufficiently good hold on the foot
- Completely closed in the front area and has a heel hold
- Heels with a sufficiently large tread surface and moderate height
- Slip-proof soles and heels
- A moulded footbed that is able to keep wear and tear within tolerable limits even with high use

If the hazard assessment according to § 5 of the Occupational Health and Safety Act indicates that additional hazards are to be expected in working areas, e.g. due to grease, wetness, chemical cleaning agents, the handling of heavy objects or the use of industrial trucks, suitable footwear, if necessary safety footwear, must be worn.

You will find assistance for risk assessment and for the selection of suitable foot protection in DGUV Regulation 112-191 (previously: BGR 191): Use of foot and knee protection.

Avoiding ESD means understanding ESD.


Highest quality and reliability are indispensable in this area. Accordingly, we use our expertise in the field of ESD to avoid the dangerous effects of ESD, such as damage to electronic components in production.

We are continuously expanding our range of ESD safety footwear and are constantly addressing the following situations:

- What actually happens in the production of highly sensitive components?
- Which static charges of the employees are still present despite extensive ESD measures?
- Monitoring of employees in the workplace, measured in Volt.

Information

Electrical contact resistance and protection against electrostatic phenomena.
ESD shoe as primary measure in the person / shoe / floor system.

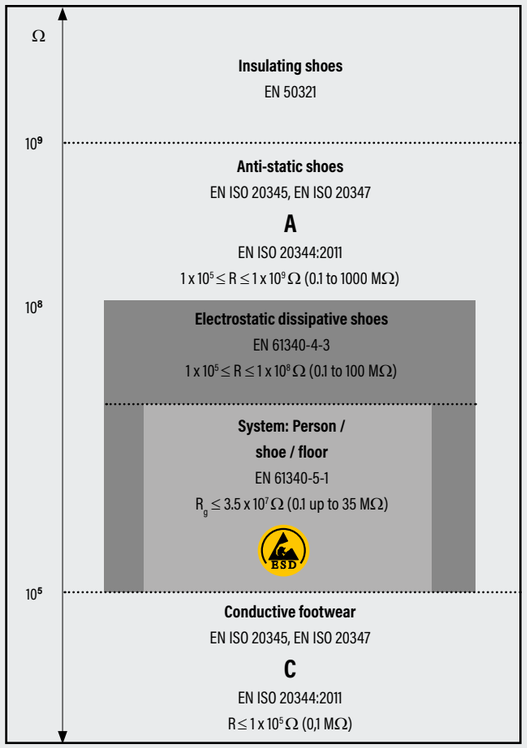

A and C: Additional requirements of electrical properties in occupational and safety shoes. R: electrical resistance. R_g: Earth leakage resistance.

The use of test stations has become established for the daily functional testing of the shoes. Here, the resistance of the person and the shoe is measured. When performing the test, care should be taken to test both feet separately.



Electrostatic discharge

ESD (short for electrostatic discharge) refers to the equalisation of large potential differences, which causes high voltage pulses. Under certain circumstances, this voltage pulse can damage or even destroy electronic components.

Potential differences are often caused by friction or contact and separation of two objects. In the process, a human being can be charged to approx. 30,000 V. Only from a strength of the electrostatic discharge of approx. 3,000 V is it perceptible to humans as the feeling of an electric shock. Electrostatic sensitive components, on the other hand, can sometimes only tolerate 5 - 30 V blocking voltages. Therefore, when working with electrostatically sensitive components, measures must be taken to reliably reduce charges and therefore also avoid rapid discharges.

Measures against static discharges are described in EN 61340-5-1. Effective personal earthing through the use of suitable ESD footwear serves to protect sensitive components by continuously dissipating charges.

In practice, the conductivity of ESD shoes is not only significantly influenced by the prevailing climate (humidity and temperature), but also by factors such as soiling, floor conditions, human body resistance. ESD officers in companies are therefore required to regularly check whether the ESD products used still have the required effect. In areas where ESD shoes are worn, the floor resistance should be such that the protective function provided by the shoe is not nullified. The performance of “walking tests” allows the human-shoe-floor system to be tested.

Warning advice: ESD shoes are not suitable for electricians or when working on sources of electrical stress.

Wearing EN 61340-4-3 and EN 61340-5-1 certified footwear is highly recommended, not only in the area of the chemical and electrical industries, when handling flammable liquids and gases, paints and varnishes, but also in traditional areas with intensive dust exposure such as printing plants, mills, grain warehouses, or woodworking industries, as ESD footwear can reduce the risk of ignition due to an electrostatic discharge.

Technical rules for safety at work (TRBS 2153)
According to TRBS 2153 point 7.1, dissipative footwear with a contact resistance of less than 100 MOhm must be used in potentially explosive atmospheres. Our shoes meet this requirement according to EN 61340-4-3 (test with metal balls in the shoe on a metal plate) and EN 61340-5-1 (test with human in the shoe on a metal plate).



TECHNOLOGIES

C°LD PROTECTION

Guarantees thermal comfort when working in cold rooms, cold stores and outdoors

Our cold protection technology ensures that the wearer's foot is insulated against very low temperatures, down to -25°C. The Thinsulate material used is a unique microfibre technology that ensures the highest thermal performance with the lowest weight and thickness.

PRT FLEX

Ensures high wearing comfort and ergonomics at work

The high flexibility of the shoe is achieved by raising the tip pad and the rear part of the tread, which allows the sole to adapt to the anatomical movements of the foot when walking, bending, kneeling and working in different body positions. With PRT FLEX, the flexibility of the sole and its ability to adapt to the natural changes in position of the foot in the shoe makes it much easier to move on different surfaces.

ANA-TECH

ANA-TECH is a technology whose secret is the carefully designed shape of the sole. **The widened heel area helps to minimise the risk of ankle sprains** thanks to a larger surface area near the ground than standard shoes.

PROTENDON

The special construction of the upper is the application of PRO-TENDON technology, which aims to reinforce the protection of the Achilles tendon, significantly improving resistance to mechanical injuries. In addition, this construction stabilises the ankle joint, which reduces the possibility of twisting.

SHOCK ABSORBER

Reduces the strain on joints and prevents posture damage and injuries

Shock absorption reduces the occurrence of micro-damage. SHOCK ABSORBER is a technology used in the construction of special shoe soles to relieve the joints as much as possible during movement. The system is found in the sole in the form of contrasting inlays. SHOCK ABSORBER dissipates large amounts of kinetic energy that impact the body with every step. The SHOCK ABSORBER technology not only increases the ergonomic value of the shoe, but also helps to prevent posture problems and injuries.

SELF CLEAN

The SELF CLEAN technology used in the construction of the sole is a system of channels in the tread that automatically drain water on a regular basis. This ensures grip and stability even on wet surfaces. SELF CLEAN provides extra grip even during intense movements between wet and dry surfaces.

abeba

OCCUPATIONAL SHOES (O – "OCCUPATIONAL") refer to footwear which has protective functions and is intended to protect the wearer against injuries which may occur in the event of an accident. Occupational shoes are classified as personal protective equipment and meet the requirements of the EN ISO 20347:2012 standard.

	Requirements					
Categories of occupational shoes (O)	OB	O1	O2	O3	O4	O5
Penetration resistance (P)				✓		✓
Closed heel		✓	✓	✓	✓	✓
Oil and petrol resistance						
Anti-electrostatic properties (A)		✓	✓	✓	✓	✓
Energy absorption in the heel area (E)		✓	✓	✓	✓	✓
Water permeability and water absorption (WRU)			✓	✓		
Water resistance (WR)					✓	✓
Slip resistance (SRA or SRB or SRC)	✓	✓	✓	✓	✓	✓
Formed sole				✓		✓

SAFETY SHOES (S - "SAFETY") are used in workplaces where there is a risk of mechanical damage. Safety shoes are equipped with shoe caps that protect the toes from injury. Their strength is tested by impacts with 200J and against pressure with a force of at least 15 kN. Safety footwear is classified as personal protective equipment and meets the requirements of the EN ISO 20345:2011 standard.

	Requirements						
Categories of safety shoes (S)	SB	S1	S2	S3	S4	S5	S1P
Toe cap - protection of the toes against impacts with 200J and against pressure with a force of at least 15 kN.	✓	✓	✓	✓	✓	✓	✓
Penetration resistance (P)				✓		✓	✓
Closed heel		✓	✓	✓	✓	✓	✓
Slip resistance (SRA or SRB or SRC)	✓	✓	✓	✓	✓	✓	✓
Anti-electrostatic properties (A)		✓	✓	✓	✓	✓	✓
Energy absorption in the heel area (E)		✓	✓	✓	✓	✓	✓
Water permeability and water absorption (WRU)			✓	✓			
Water resistance (WR)					✓	✓	
Oil and petrol resistance (FO)		✓	✓	✓	✓	✓	✓
Formed sole				✓		✓	

REQUIREMENTS OF OCCUPATIONAL AND SAFETY SHOES
(Excerpt from standards EN ISO 20345:2011 + EN ISO 20345:2022 or EN ISO 20347:2012 + EN ISO 20347:2022)

		Requirements																				
Category		OB	O1	O2	O3	SB	S1	S1P	S1PL*	S1PS*	S2	S3	S3L*	S3S*	S4	S5	S5L*	S5S*	S6*	S7*	S7L*	S7S*
Toe cap						■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Specified slip resistance		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Closed heel		□	■	■	■	□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
A - anti-static shoes		□	■	■	■	□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
E - Energy absorption in the toe area		□	■	■	■	□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Penetration resistance	P - Resistance to puncture, metallic inlays	□	□	□	■	□	□	■	□	□	□	■	□	□	□	■	□	□	□	■	□	□
	PL - Resistance to puncture, non-metallic inlays, type PL	□	□	□	□	□	□	□	■	□	□	□	■	□	□	□	■	□	□	□	■	□
	PS - Resistance to puncture, non-metallic inlays, type PS	□	□	□	□	□	□	□	□	■	□	□	□	■	□	□	□	■	□	□	□	■
WPA - water penetration and water absorption		□	□	■	■	□	□	□	□	□	■	■	■	■	□	□	□	□	■	■	■	■
WR - Water resistance		□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	■	■	■	■
Profile sole		□	□	□	■							■	■	■		■	■	■		■	■	■

*New norm from 2022 ■ Requirement specified by category □ Requirement not specified by category, can be optionally fulfilled

OCCUPATIONAL SHOES

abeba

ACTIVE



PROPERTIES

FIT - normal: increased durability of the upper, increased breathability, easy to clean upper

TREAD PU / PU

SRC slip resistance

PRT FLEX technology
improves comfort and ergonomics, sole adapts to the anatomical movements of the foot

Shock absorber technology
reduces the occurrence of micro-damage, reduces the strain on joints and prevents posture damage and injuries

Self Clean (self-cleaning tread)
is a system of channels in the tread that automatically drain water on a regular basis. This ensures grip and stability even on wet surfaces.

High abrasion resistance

abeba

❶



812018 Size 36-48



810019 Size 36-48




845018 Size 36-48



814018 Size 36-43



824018 Size 36-43

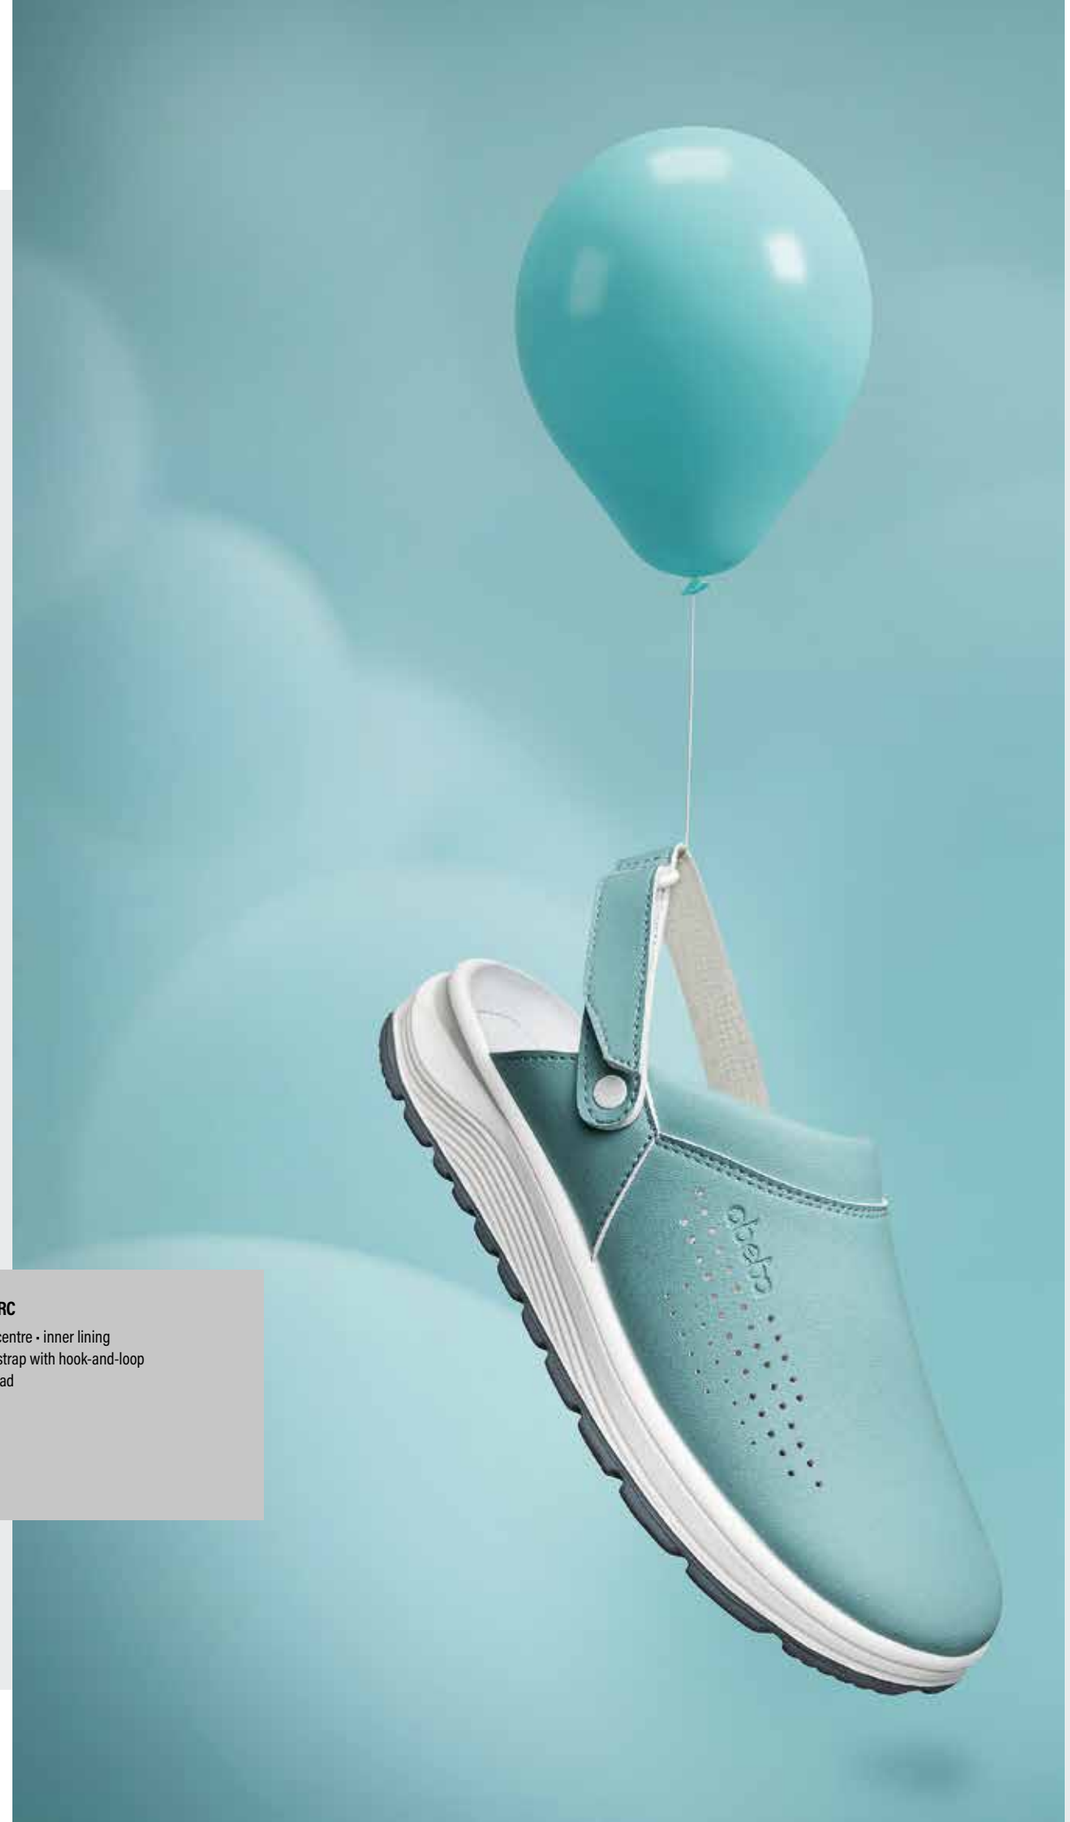

❷



812020 Size 36-48

❷



810020 Size 36-48

❷



845020 Size 36-48

❷



824020 Size 36-43

❶ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• upper material **microfibre**, perforated on side • inner lining textile • increased breathability • flexible heel strap with hook-and-loop • anti-slip PU/PU-tread

OB 30° HACCP

❷ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• upper material **microfibre**, perforated on centre • inner lining textile • increased breathability • fixed heel strap with hook-and-loop • adaptable instep area • anti-slip PU/PU-tread

OB 30° HACCP



❶ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• size 36-48 • upper material **microfibre** • inner lining textile • increased breathability • flexible heel strap with buckle • anti-slip PU/PU-tread

OB · 30° · HACCP

❷ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• upper material **leather** • inner lining textile • increased breathability • flexible heel strap with buckle • anti-slip PU/PU-tread

OB

❸ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• size 36-48 • upper material **leather** • inner lining velours leather • increased breathability • adaptable instep area • anti-slip PU/PU-tread

OB

❹ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• size 36-48 • smooth leather • upper material **leather** • inner lining textile • increased breathability • fixed heel strap with hook-and-loop • adaptable instep area • anti-slip PU/PU-tread

OB

❷



85081 Size 36-43

85080 perforated



87081 Size 36-43

87080 perforated



87021 Size 36-48

87020 perforated



87031 Size 36-48

87030 perforated

❶



877021

877020 perforated

877031

877030 perforated

❸



87050

❹



87208

87209

abeba

THE ORIGINAL PLUS
THE ORIGINAL PLUS



PROPERTIES

FIT - narrow-normal

TREAD TPU

SRC slip resistance



❶ **7521**

37520 ESD, perforated



❷ **7091**

7090 perforated

❶ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

- size 36-42 • upper material **microfibre**
- cover patch microfibre • flexible, adjustable heel
- anti-slip TPU-tread

OB 30° micro

❷ **CE, EN ISO 20347 - OB, FO, SRC**

- size 35-43 • upper material **smooth leather**
- cover sole leather • flexible, adjustable heel
- anti-slip tread

OB

abeba

DYNAMIC

PROPERTIES

FIT - narrow-normal

INLAY

Replaceable Active Comfort inlay
(Art. 352610), further information on page 104

Orthopaedic inlays possible

TREAD TPU

SRC slip resistance

Flex zones, walking comfort

abeba

❶



7310



37310 ESD



7312



37312 ESD




7313



37313 ESD



7315



37315 ESD

❶ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• size 35-48 • upper material **smooth leather** • flexible, adjustable heel strap
• replaceable Active Comfort inlay (Art. 352610) • anti-slip TPU-tread

❷ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• size 35-48 • upper material **knitted textile** • protection from splashes
• fixed, adjustable heel • replaceable Active Comfort inlay (Art. 352610)
• anti-slip TPU-tread

❸ **CE, EN ISO 20347 - OB, A, E, FO, SRC** micro

• size 35-43 • upper material **microfibre with print** • fixed, adjustable heel
• replaceable Active Comfort inlay (Art. 352610) • anti-slip TPU-tread



❷



7329

37329 ESD

❷



7328

37328 ESD

❷



7326



37326 ESD

❸



7320



37320 ESD

❶



7335



37335 ESD



7331



37331 ESD



7332



37332 ESD

Shaft fully made of microfibre

❷




7345



37345 ESD



7341



37341 ESD



37343 ESD

Shaft made of microfibre with breathable textile inserts

❸




7360



37360 ESD



7361



37361 ESD

❶ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

- size 35-48 • upper material **microfibre** • shaft made from a singe piece
- fixed, adjustable heel strap• replaceable Active Comfort inlay (Art. 352610)
- anti-slip TPU-tread

OB · 30° · HACCP · DGUV 112-191 · ESD · micro

❷ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

- size 35-48 • upper material **microfibre with breathable textile**
- fixed, adjustable heel strap• replaceable Active Comfort inlay (Art. 352610)
- anti-slip TPU-tread

OB · 30° · DGUV 112-191 · ESD · micro

❸ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

- size 35-48 • upper material **microfibre** • fixed, adjustable heel strap
- replaceable Active Comfort inlay (Art. 352610)
- anti-slip TPU-tread

OB · 30° · HACCP · DGUV 112-191 · ESD · micro

EASY 2.0

PROPERTIES

FIT - normal

INLAY

Replaceable inlay

Orthopaedic inlays possible

TREAD PU / PU

SRC slip resistance

PRT FLEX technology improves comfort and ergonomics, sole adapts to the anatomical movements of the foot

Shock absorber technology reduces the occurrence of micro-damage, reduces the strain on joints and prevents posture damage and injuries

Self Clean (self-cleaning tread) is a system of channels in the tread that automatically drain water on a regular basis. This ensures grip and stability even on wet surfaces.

High abrasion resistance

abeba

❶



87630

837630 ESD



87631

837631 ESD

❷



87621

837621 ESD



87620

837620 ESD

❸



87622



837622 ESD

❶+❸ CE, EN ISO 20347 - OB, A, E, FO, SRC

- size 35-48 • upper material **smooth leather**
- flexible, adjustable heel strap • replaceable inlay
- anti-slip PU/PU-tread

OB · DGUV 112-191 · ESD

❷ CE, EN ISO 20347 - OB, A, E, FO, SRC micro

- size 35-43 • upper material **microfibre patent**
- fixed, adjustable heel strap • replaceable inlay
- anti-slip PU/PU-tread

OB · 30° · DGUV 112-191 · ESD

abeba

RUBBER

PROPERTIES

FIT - normal


TREAD

SRC slip resistance

Rubber tread, abrasion-resistant

Cross/circular profile



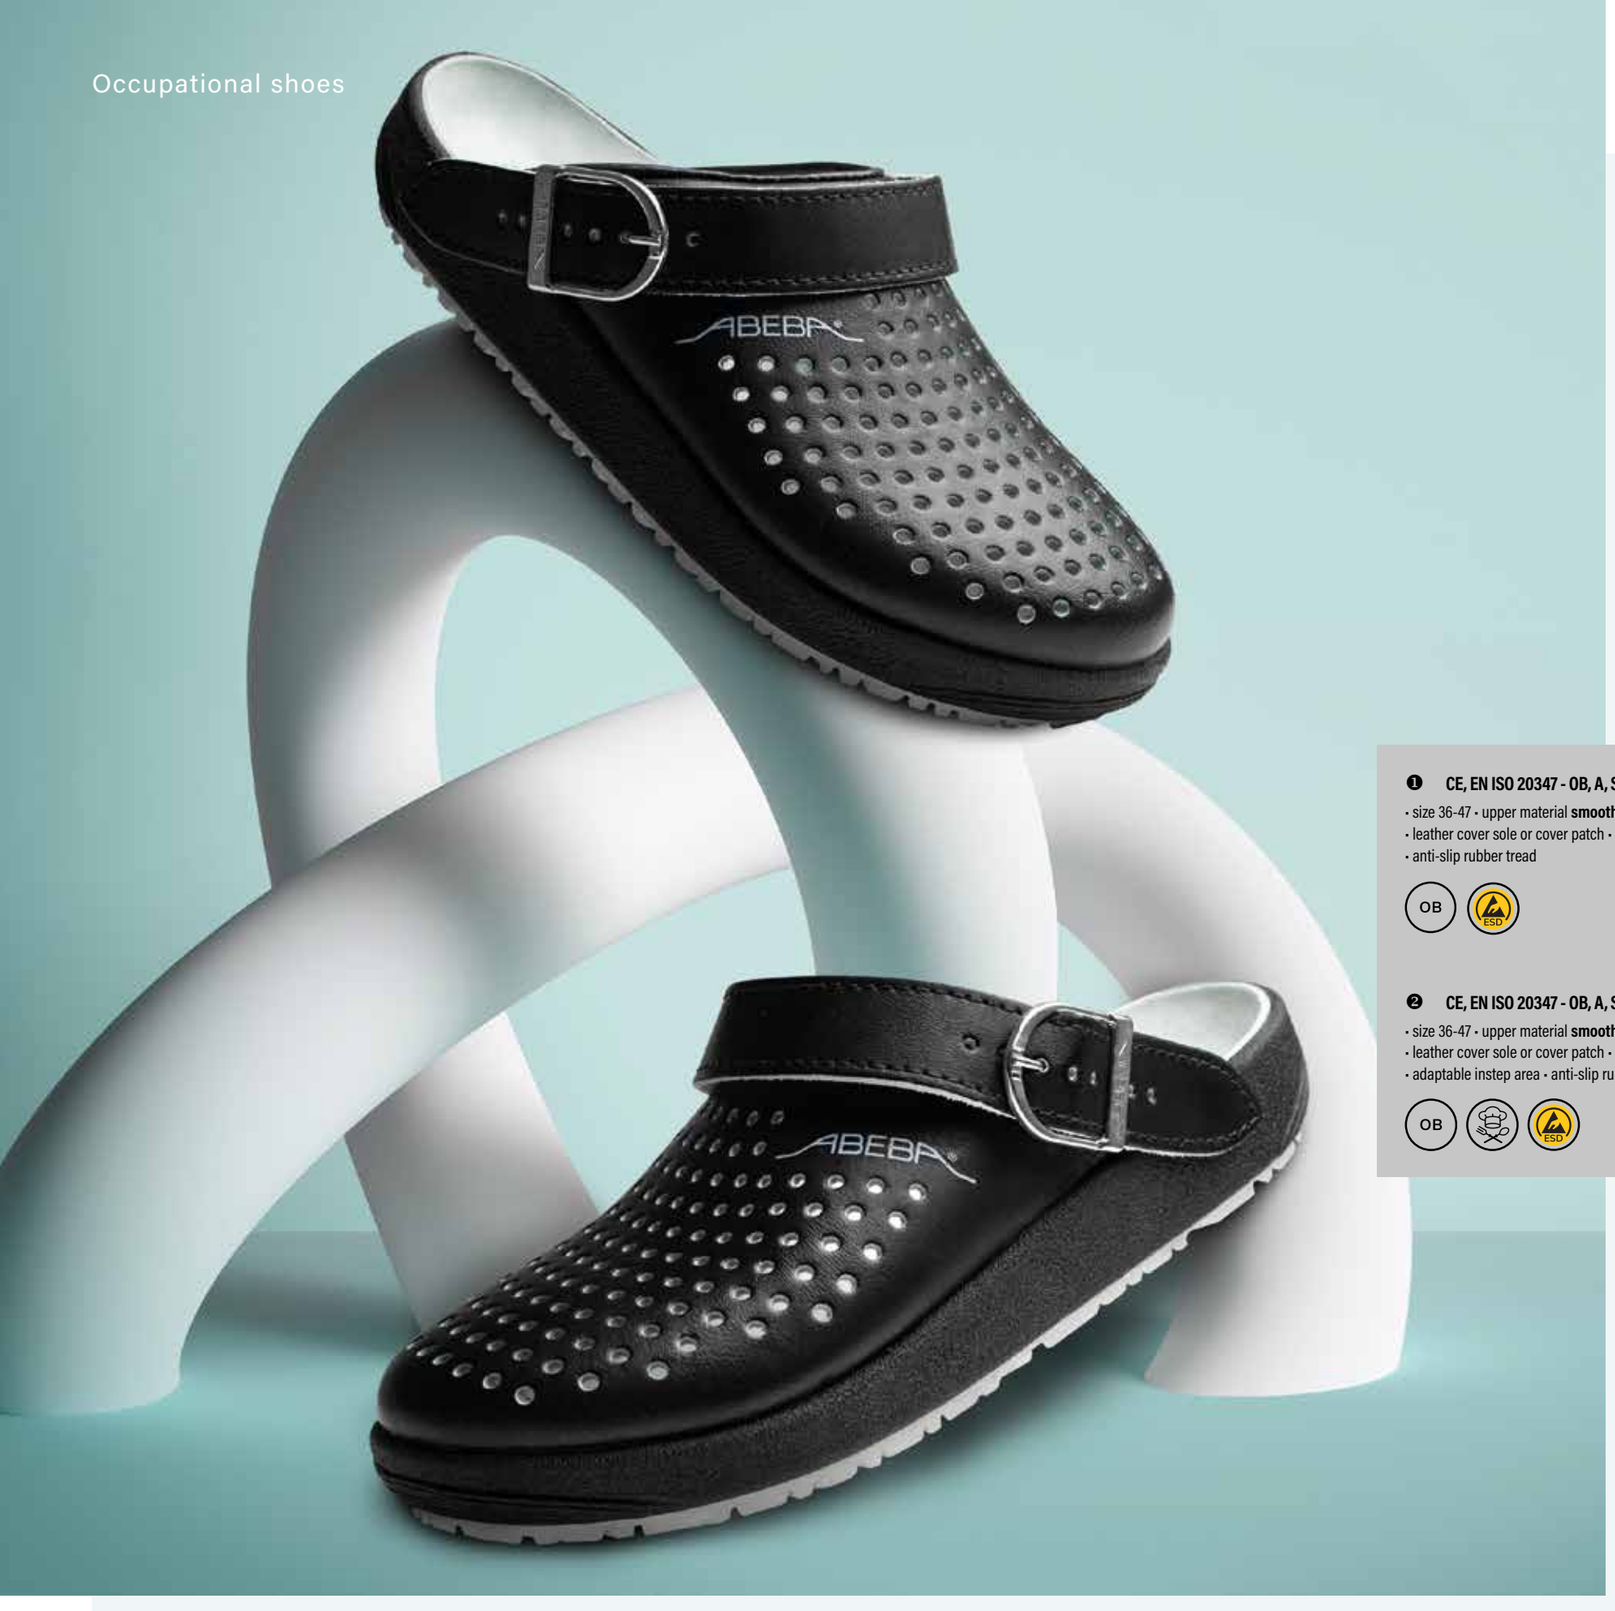

abeba

❶



9200



5200* ESD



9250



5250* ESD



9310*



5310* ESD



9300



5300* ESD

❶ **CE, EN ISO 20347 - OB, A, SR, FO / *OB, A, FO, SRC**

• size 36-47 • upper material **smooth leather**
• leather cover sole or cover patch • flexible, adjustable heel strap
• anti-slip rubber tread

OB ESD

❷ **CE, EN ISO 20347 - OB, A, SR, FO / *OB, A, FO, SRC**

• size 36-47 • upper material **smooth leather**
• leather cover sole or cover patch • fixed, adjustable heel strap
• adaptable instep area • anti-slip rubber tread

OB ESD

❸ **CE, EN ISO 20347 - OB, A, FO, SRC**

• size 36-47 • upper material **smooth leather**
• flexible, adjustable heel strap • anti-slip rubber tread

OB

❹ **CE, EN ISO 20347 - OB, A, FO, SRC**

• size 36-47 • upper material **smooth leather**
• leather cover sole • fixed, adjustable heel strap
• flexible, adjustable heel strap • anti-slip rubber tread

OB

❷



9100



5100* ESD



9150



5150* ESD

❸



9252

❹



9110

abeba

ARROW

PROPERTIES

FIT - broad

TREAD TPU

SRA slip resistance



❶



38330 ESD

❷



35600 ESD

❷



38200 ESD



38210 ESD

❸



38600 ESD

❶ **CE, EN ISO 20347 - OB, A, FO, SRA**

- size 36-47 • upper material **microfibre**
- cover patch microfibre • flexible, adjustable heel
- weight-optimised mono-PU-tread

OB 30° ESD micro

❷ **CE, EN ISO 20347 - OB, A, FO, SRA**

- size 36-47 • upper material **smooth leather**
- cover patch microfibre
- breathable and moisture-absorbing microfibre inner lining
- flexible, adjustable heel • anti-slip PU-tread

OB ESD

❸ **CE, EN ISO 20347 - OB, A, FO, SRA**

- size 36-47 • upper material **smooth leather**
- cover patch microfibre • breathable and moisture-absorbing microfibre inner lining • fixed, adjustable heel
- Instep area padded with elasticated cord • anti-slip PU-tread

OB ESD

PROPERTIES

FIT - normal

CORK FOOT BED

Leather-covered, skin-friendly, moisture-absorbing toe grip with active cushioning

TREAD

SRC slip resistance, rubber tread, abrasion-resistant

NATURE

❶




8040



4040 ESD

8045



4055 ESD

❷



4045 ESD

4050 ESD

❸



4080 ESD

4085 ESD

❶ **CE, EN ISO 20347 - OB, A, FO, SRC**

• size 34-48 • upper material **smooth leather** • fixed, adjustable heel • adjustable instep strap • buckle fastener • anti-slip rubber tread

OB

❸ **CE, EN ISO 20347 - OB, A, FO, SRC**

• size 34-48 • upper material **smooth leather**
• 2 adjustable instep straps • hook-and-loop fastener
• anti-slip rubber tread

OB

❷+❺+❻ **CE, EN ISO 20347 - OB, A, FO, SRC**

• size 34-48 • upper material **smooth leather** ❷+❺ / **velours** ❻ • fixed, adjustable heel • adjustable instep strap
• anti-slip rubber tread

OB

❹ **CE, EN ISO 20347 - OB, A, FO, SRC**

• size 34-48 • upper material **velours**
• 2 adjustable instep straps • buckle fastener
• anti-slip rubber tread

OB

abeba



❹



4086 ESD

❺



4090 ESD

❻



4096 ESD

AUTOCLAVABLE

PROPERTIES

FIT - normal, autoclave-safe special material, autoclavable at 135°C, 5 min (without additives), washable at 60°C (without additives)

TREAD

SRC anti-slip sole, abrasion-resistant

abeba

❶



❶ **CE, EN ISO 20347 - OB, A, E, SRC**

- double size* 35/**36** - 45/**46** · **special material**
- flexible, adjustable heel · autoclave-safe · anti-slip tread

OB · 135° · 60° · ESD

*Double size:

Please always specify the size in bold when ordering.

35/**36**, 37/**38**, 39/**40**, 41/**42**, 43/**44**, 45/**46**

NOTE

- To avoid damage to the shoes, the shoes must not touch each other during the autoclaving process.

abeba

AIR CUSHION

PROPERTIES

FIT - narrow-normal

INLAY

Replaceable inlay (Art. 3551), further information on page 104

TREAD PU

SRA slip resistance, PU air cushion, sole with active cushioning, extremely light sole



❶



32300 ESD Size 35-47



32310 ESD Size 39-47

❷



2610

32610 ESD



2600

32600 ESD

❸



2370

32370 ESD

❶ **CE, EN ISO 20347 - 01, SRA**

• upper material **grained leather** • breathable and moisture-absorbing microfibre inner lining • replaceable inlay (Art. 3551)
• anti-slip PU tread

❷ **CE, EN ISO 20347 - 02, SRA**

• size 35-47 • upper material **smooth leather** • **grained leather**
• breathable and moisture-absorbing microfibre inner lining
• replaceable inlay (Art. 3551) • anti-slip PU tread

❸ **CE, EN ISO 20347 - 01, SRA**

• size 35-47 • upper material **microfibre** • instep area with elasticated cord • incorporated footbed • washable • anti-slip PU-tread

micro

abeba

PROPERTIES

FIT - normal

LACES

Set suitable for all laced shoes (Art. 370118),
further information on page 105

INLAY

Replaceable Active Comfort inlay (Art. 352510),
further information on page 104

Orthopaedic inlays possible

TREAD TPU

SRC slip resistance

Flex zones, walking comfort

UNI6

abeba



6780



36780 ESD



6781



36781 ESD



6750



36750 ESD



36721 ESD





6760 - 01



36760 ESD, 01



6761 - 02



36761 ESD, 02



6728



36728 ESD



6729



36729 ESD

❶ **CE, EN ISO 20347 - O2, FO, SRC**

• size 35-48 • upper material **microfibre** • replaceable Active Comfort inlay (Art. 352510) • anti-slip TPU tread



❷ **CE, EN ISO 20347 - O2, FO, SRC**

• size 35-48 • upper material **smooth leather** • breathable and moisture-absorbing microfibre inner lining • replaceable Active Comfort inlay (Art. 352510) • anti-slip TPU-tread



❸ **CE, EN ISO 20347 - O1, FO, SRC**

• size 35-48 • upper material **velours with breathable textile**
• replaceable Active Comfort inlay (Art. 352510) • anti-slip TPU-tread



❹ **CE, EN ISO 20347 - O1/O2, FO, SRC**

• size 35-48 • upper material **functional leather in honeycomb design** • water-repellent • scratch-resistant • replaceable Active Comfort inlay (Art. 352510) • anti-slip TPU-tread



❺ **CE, EN ISO 20347 - O2, FO, SRC**

• size 35-48 • upper material **microfibre textile** • water-repellent
• replaceable Active Comfort inlay (Art. 352510) • anti-slip TPU-tread



UNI6 occupational shoes
Also available as safety shoes

❶



6772



36772 ESD



6773



36773 ESD



6774 incl. blue laces



36774 ESD, incl. blue laces



6775



36775 ESD



6776



36776 ESD

❷



36740 ESD



6741



36741 ESD

UNI6 occupational shoes also available as safety shoes



❶ **CE, EN ISO 20347 - O2, FO, SRC**

• size 35-48 • upper material **knitted textile** • protection from splashes • replaceable Active Comfort inlay (Art. 352510) • anti-slip TPU-tread

❷ **CE, EN ISO 20347 - O2, FO, SRC** micro

• size 35-48 • upper material **microfibre** • instep area with elasticated cord • replaceable Active Comfort inlay (Art. 352510) • anti-slip TPU-tread

abeba

PROPERTIES

FIT - normal

❶ **CE, EN ISO 20347 - O1, SRB**

• size 40-47 • upper material **smooth leather** • breathable and moisture-absorbing microfibre inner lining • cover patch microfibre • anti-slip ESD-compliant tread

O1 ESD

❷ **CE, EN ISO 20347 - O1, FO, SRB**

• size 36-42 • upper material **smooth leather** • breathable and moisture-absorbing microfibre inner lining • Instep area with hook-and-loop
• fixed, incorporated footbed • anti-slip tread

O1

❸

• size 34-42 • upper material **smooth leather** • padded joint support
• instep area with laces • comfort footbed • heel 45 mm • anti-slip tread

❶



32450 ESD

❷



3030

❸



3000

abeba

X-LIGHT

PROPERTIES

FIT - normal

Raised sole possible

LACES

Set suitable for all laced shoes (Art. 370118), further information on page 105

INLAY

Replaceable Active Comfort inlay (Art. 351610 - closed, Art. 351710 - open), further information on page 104

Orthopaedic inlays possible

TREAD PU

SRC slip resistance, particularly good damping, light, stable and wear-resistant Flex zones walking comfort

❶



7131141 ESD



7131142 ESD

❷



711135



7131135 ESD



711130



7131130 ESD

❸



711132



7131132 ESD



711137 ESD



7131137 ESD

❶ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• size 35-48 • upper material **smooth leather** • flexible, adjustable heel • instep area with elasticated cord • replaceable Active Comfort inlay (Art. 351710) • anti-slip PU-tread

❷ **CE, EN ISO 20347 - OB, A, E, FO, SRC**

• size 35-48 • upper material **smooth leather** • fixed, adjustable heel • instep area with elasticated cord • replaceable Active Comfort inlay (Art. 351710) • anti-slip PU-tread

❸ **CE, EN ISO 20347 - O2, FO, SRC**

• size 35-48 • upper material **smooth leather** • instep area with elasticated cord • replaceable Active Comfort inlay (Art. 351610) • anti-slip PU-tread

x-light occupational shoe also available as a safety shoe



abeba



x-light occupational shoe also available as a safety shoe

❶ **CE, EN ISO 20347 - 01, FO, SRC**

• size 35-48 • upper material **smooth leather with breathable Air-Mesh textile inserts**
• double hook and loop fastener • replaceable Active Comfort inlay (Art. 351610) • anti-slip PU-tread

❷ **CE, EN ISO 20347 - 02, FO, SRC**

• size 35-48 • upper material **microfibre** • replaceable Active Comfort inlay (Art. 351610) • anti-slip PU-tread

❸ **CE, EN ISO 20347 - 02, FO, SRC**

• size 35-48 • upper material **smooth leather** • reflective strips • replaceable Active Comfort inlay (Art. 351610) • anti-slip PU-tread

❶



711131



7131131 ESD



7131136 ESD

❷



711126



7131126 ESD



711127



7131127 ESD

❸



711133



7131133 ESD



711138



7131138 ESD

abeba

REFLEXOR



PROPERTIES

FIT

Reflexor - normal

Reflexor Comfort - wide/broad

Handmade seam for best comfort

INLAY

Reflexor:

Replaceable Reflexor® inlays (Art. 3567, Art. 3568, Art. 3569, Art. 3570, Art. 3565 / 3566, Art. 3585 / 3586), further information on page 105

Orthopaedic inlays possible in Reflexor

Reflexor Comfort:

Replaceable Reflexor® Massage Active footbed (Art. 3584, Art. 3572), further information on page 105

TREAD PU

SRB slip resistance, extremely light

Reflexor for ladies

❶



36902 ESD



36912 ESD

❷



31092 ESD

❸



6903

Reflexor for men

❹



5700 ESD



5710



35710 ESD



Reflexor Comfort

❺



36872 ESD

❻



36813 ESD

❶ CE, EN ISO 20347 - OB, A, E, SRB

- size 36-42 • upper material **smooth leather**
- breathable and moisture-absorbing microfibre inner lining
- triple hook-and-loop • 2 replaceable Reflexor inlays (Art. 3565/3568)
- anti-slip PU-tread

OB · DGUV 112-191 · ESD

❷

- size 36-42 • upper material **smooth leather**
- breathable and moisture-absorbing microfibre inner lining
- fixed, incorporated Reflexor massage footbed • anti-slip PU-tread

ESD

❸ CE, EN ISO 20347 - OB, A, E, SRB

- size 36-42 • upper material **smooth leather**
- breathable and moisture-absorbing microfibre inner lining
- flexible, adjustable heel strap • instep area with elastic cord
- 2 replaceable Reflexor inlays (Art. 3565/3568) • anti-slip PU-tread

OB · DGUV 112-191

❹ CE, EN ISO 20347 - 01, SRB

- size 40-46 • upper material **smooth leather**
- breathable and moisture-absorbing microfibre inner lining
- 2 replaceable Reflexor inlays (Art. 3566/3570) • anti-slip PU-tread

01 · DGUV 112-191 · ESD

❺ CE, EN ISO 20347 - OB, A, E, SRB

- size 36-43 • upper material **velours**
- breathable and moisture-absorbing microfibre inner lining
- fixed, adjustable heel • Instep area with elasticated cord
- replaceable Reflexor inlays (Art. 3572) • anti-slip PU-tread

OB · ESD

❻ CE, EN ISO 20347 - OB, A, E, SRB

- size 36-43 • upper material **smooth leather**
- breathable and moisture-absorbing microfibre inner lining
- flexible, adjustable heel • Instep area with elasticated cord
- replaceable Reflexor inlays (Art. 3572) • anti-slip PU-tread

OB · ESD

CLEANROOM

abeba

❶



3620 ESD

❶ **CE, EN ISO 20347 - OB, A, E, SRA**

• size 35-47 • upper material **microfibre**
• sewn-on gaiter made of cleanroom textile

OB · ESD · 30°

❷ **Minimum order quantity 50 pairs on request**

• size* Sz. 1 - Sz. 5
• upper material integrity 1750 anti-bacterial
• washable using industrial washing processes up to 60°C • artificial leather sole
• foot entry with elasticated cord

ESD · 60°

*Size:
• Sz. 1 = 36-37 • Sz. 2 = 38-39 • Sz. 3 = 40-43
• Sz. 4 = 44-46 • Sz. 5 = 47-48

❷



3910 ESD, blue



3900 ESD, white



ESD

CUSTOMISED SPECIAL SHOES ON REQUEST

The special shoe shown here is just one example of individual solutions. Let us know your wishes and we will work out solutions together to develop and deliver the right model for you as quickly as possible. Contact us at abeba@abeba.de!

SAFETY SHOES



CLASSIC



abeba

❶



1000



31000 ESD



1010



31010 ESD

❷



1011



31011 ESD



1001

❸



1500

❶ CE, EN ISO 20345 - SB, A, E, FO, SRC

• size 36-46 • upper material **grained leather**
• breathable and moisture-absorbing microfibre inner lining • cover patch microfibre • fixed, adjustable heel
• adaptable instep area • buckle fastener
• anti-slip PU-tread

SB · STEEL · ESD

❷ CE, EN ISO 20345 - SB, A, E, FO, SRC

• size 36-46 • upper material **microfibre**
• breathable and moisture-absorbing microfibre inner lining • cover patch microfibre • fixed, adjustable heel
• adaptable instep area • buckle fastener
• anti-slip PU-tread

SB · STEEL · 30° · HACCP · ESD

micro

❸ CE, EN ISO 20345 - S2, SRC

• size 36-46 • upper material **grained leather**
• breathable and moisture-absorbing microfibre inner lining • cover patch microfibre
• adaptable instep area • anti-slip PU-tread

S2 · STEEL

X-LIGHT

PROPERTIES

FIT - normal

Raised sole possible (except for S3 models)

LACES

Set suitable for all laced shoes (Art. 370118), further information on page 105

INLAY

Replaceable Active Comfort inlay (Art. 351620 - closed, Art. 351720 - open), further information on page 104

Orthopaedic inlays possible

TREAD PU

SRC slip resistance, particularly good damping, light, stable and wear-resistant Flex zones, walking comfort





❶



711041



711042

7131041 ESD

7131042 ESD

❷



711035



711030

7131035 ESD

7131030 ESD

❸



711031



711036 ESD

7131031 ESD

7131036 ESD

❹



711028



711029 ESD

7131028 ESD

7131029 ESD

X-LIGHT

x-light occupational shoes also available as safety shoes

❶ **CE, EN ISO 20345 - SB, A, E, FO, SRC**

• size 35-48 • upper material **smooth leather** • flexible, adjustable heel • Instep area with elasticated cord • replaceable Active Comfort inlay (Art. 351720) • anti-slip PU-tread

❷ **CE, EN ISO 20345 - SB, A, E, FO, SRC**

• size 35-48 • upper material **smooth leather** • fixed, adjustable heel • Instep area with elasticated cord • replaceable Active Comfort inlay (Art. 351720) • anti-slip PU-tread

❸ **CE, EN ISO 20345 - S1, SRC**

• size 35-48 • upper material **smooth leather with breathable Air-Mesh textile inserts** • double hook-and-loop fastener • replaceable Active Comfort inlay (Art. 351620) • anti-slip PU-tread

micro

❹ **CE, EN ISO 20345 - S2, SRC**

• size 35-48 • upper material **microfibre** • instep area with elasticated cord • replaceable Active Comfort inlay (Art. 351620) • anti-slip PU-tread



x-light occupational shoes also available as safety shoes

❸



711032



7131032 ESD



711037



7131037 ESD

❹



711027



7131027 ESD



711026



7131026 ESD

❶



7131860 ESD

❷



7131020 ESD

❶ **CE, EN ISO 20345 - S3, SRC**

• size 35-48 • upper material **microfibre textile** • reflective strips • replaceable Active Comfort inlay (Art. 351620) • metal-free penetration protection • anti-slip PU-tread

S3 · STEEL · DGUV 112-191 · ESD

❷ **CE, EN ISO 20345 - S1, SRC**

• size 35-48 • upper material **microfibre and 3D-mesh fabric** • blue elasticated cord • replaceable Active Comfort inlay (Art. 351620) • anti-slip PU-tread

S1 · STEEL · DGUV 112-191 · ESD · micro

❸ **CE, EN ISO 20345 - S2, SRC**

• size 35-48 • upper material **smooth leather** • instep area with elasticated cord • replaceable Active Comfort inlay (Art. 351620) • anti-slip PU-tread

S2 · STEEL · DGUV 112-191 · ESD

❹ **CE, EN ISO 20345 - S2, SRC** micro

• size 35-48 • upper material **microfibre** • replaceable Active Comfort inlay (Art. 351620) • anti-slip PU-tread

S2 · STEEL · 30° · HACCP · DGUV 112-191 · ESD

❶



711033

7131033 ESD



711038

7131038 ESD
7131874 ESD, **S3**

❷



7131056 ESD



7131058 ESD

❸



711047



7131047 ESD

❶ **CE, EN ISO 20345 - S2, SRC**

• size 35-48 • upper material **smooth leather** • reflective strips • replaceable Active Comfort inlay (Art. 351620) • metal-free, penetration resistant midsole as S3 • anti-slip PU-tread



❷ **CE, EN ISO 20345 - S1, SRC**

• size 35-48 • upper material **smooth leather with breathable Air-Mesh textile inserts** • replaceable Active Comfort inlay (Art. 351620) • anti-slip PU-tread



❸ **CE, EN ISO 20345 - S2, SRC**

• size 35-48 • upper material **microfibre** • double hook-and-loop • replaceable Active Comfort inlay (Art. 351620) • protective cap with scratch-proof coating • anti-slip PU-tread



x-light occupational shoes also available as safety shoes

abeba

PROPERTIES

FIT - broad

Raised sole possible (except for S3 and S1P models)

LACES

Set suitable for all laced shoes (Art. 370118), further information on page 105

INLAY

Replaceable Active Comfort inlay (Art. 352420 - open, Art. 352320 - closed), further information on page 104

Orthopaedic inlays possible

TREAD PU

SRC slip resistance, stable and abrasion-resistant, self-cleaning profile, torsion joint made of TPU, kink protection, high lateral stability, asymmetrical heel

ANATOM



❶



2120



32120 ESD



2125



32125 ESD

❷



2135



32135 ESD



2130



32130 ESD

❸




2131



32131 ESD



2136 ESD



32136 ESD

❶ CE, EN ISO 20345 - SB, A, E, FO, SRC

• size 36-52 • upper material **microfibre** • fixed, adjustable heel strap • adaptable instep area with elasticated cord • replaceable Active Comfort inlay (Art. 352420) • anti-slip PU-tread

❷ CE, EN ISO 20345 - S2, SRC

• size 36-52 • upper material **microfibre** • adaptable instep area with elasticated cord • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

❸ CE, EN ISO 20345 - S2, SRC

• size 36-50 • upper material **microfibre** • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

STEEL · 30° · HACCP · DGUV 112-191 · ESD · micro



❹



32189 ESD

❺



2616 ESD

❻



2626 ESD

❹ CE, EN ISO 20345 - S1, SRC

• size 36-52 • upper material **velours with breathable textile** • adaptable instep area • reflective strips • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

S1 · STEEL · DGUV 112-191 · ESD

❺ CE, EN ISO 20345 - S1, SRC micro

• size 36-50 • upper material **microfibre, perforated** • double hook-and-loop fastener • reflective strips • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

S1 · STEEL · 30° · DGUV 112-191 · ESD

❻ CE, EN ISO 20345 - S1, SRC micro

• size 36-52 • upper material **microfibre with breathable textile inserts** • reflective strips • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

S1 · STEEL · 30° · DGUV 112-191 · ESD



abeba

❹



2172



32172 ESD

❺



32268 ESD

❶ **CE, EN ISO 20345 - S2, SRC**

• size 36-48 • upper material **microfibre** • double hook-and-loop • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

S2 · STEEL · 30° · HACCP · DGUV 112-191 · ESD · micro

❷+❺ **CE, EN ISO 20345 - S3, SRC**

• size 36-52 • upper material **smooth leather** • scratch-proof coating in the toe and heel area • reflective strips • replaceable Active Comfort inlay (Art. 352320) • metal-free, penetration resistant midsole • anti-slip PU-tread

S3 · STEEL · DGUV 112-191 · ESD

❸ **CE, EN ISO 20345 - S1, SRC**

• size 36-50 • upper material **velours with breathable textile** • scratch-proof coating in the heel area• reflective strips • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

S1 · STEEL · DGUV 112-191 · ESD

❹ **CE, EN ISO 20345 - S2, SRC**

• size 36-50 • upper material **microfibre** • scratch-proof coating in the toe and heel area • reflective strips • replaceable Active Comfort inlay (Art. 352320) • anti-slip PU-tread

S2 · STEEL · 30° · HACCP · DGUV 112-191 · ESD · micro

STATIC CONTROL

❶



32140 ESD

❷



32256 ESD

❸



32147 ESD

STATIC CONTROL

❻ **S2, SRA**

• size 36-47 • upper material **microfibre** • instep area with elasticated cord • replaceable acc Wave inlay (Art. 3553) • anti-slip rubber tread

S2 · COMP · METAL FREE · 30° · HACCP · ESD · micro

❻



31392 ESD

UNI6

PROPERTIES

FIT - normal

LACES

Set suitable for all laced shoes (Art. 370118), further information on page 105

INLAY

Replaceable Active Comfort inlay (Art. 352510), further information on page 104

Orthopaedic inlays possible

TREAD TPU

SRC slip resistance, Flex zones, walking comfort

❶



1740



31740 ESD



1741



31741 ESD

❷



31795 ESD

❸



31721 ESD

❹



1760 S1



31760 S1, ESD



1761 S2



31761 S2, ESD




1765 S3



31765 S3, ESD

uni6 safety shoes also available as occupational shoes

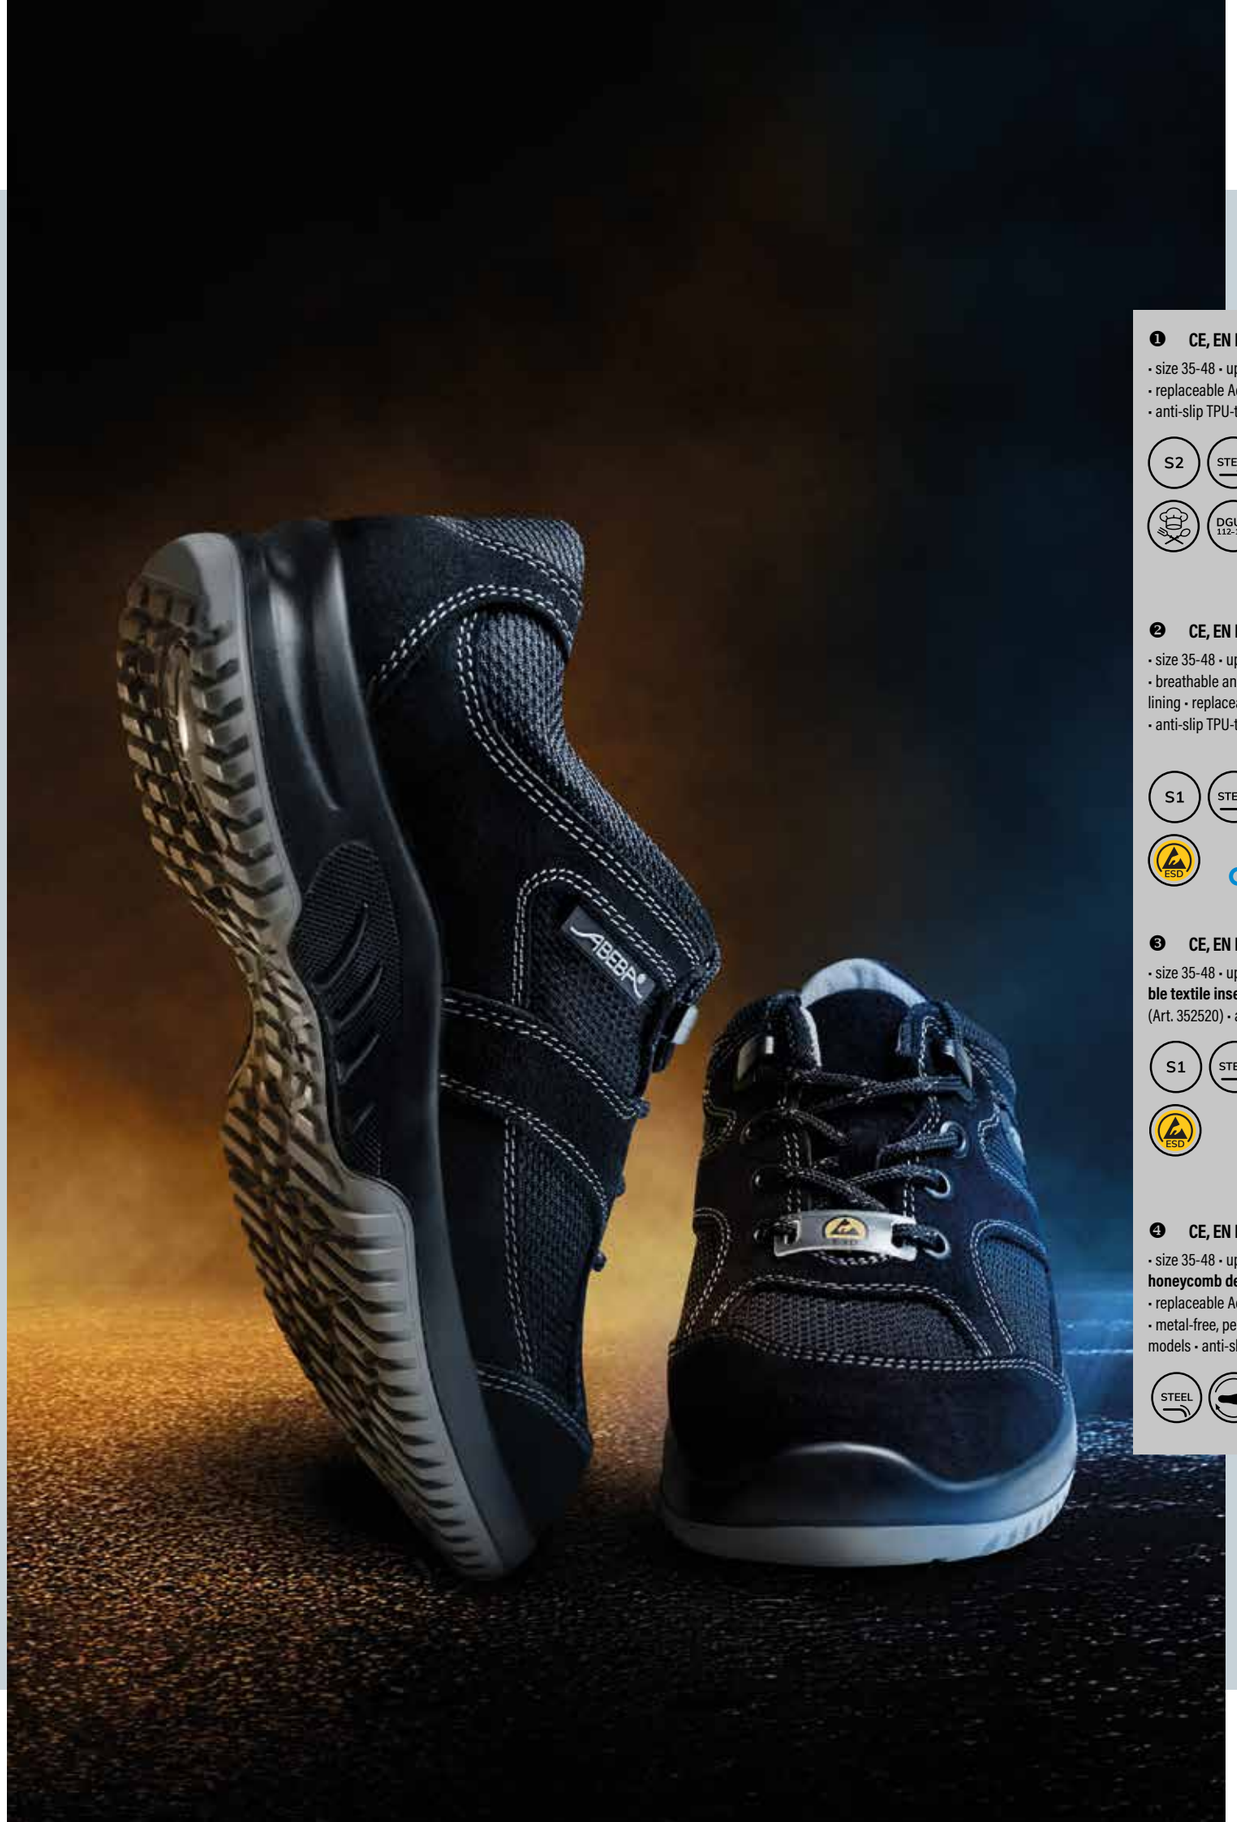

❶ **CE, EN ISO 20345 - S2, SRC**

• size 35-48 • upper material **microfibre**
• replaceable Active Comfort inlay (Art. 352520)
• anti-slip TPU-tread

S2 · STEEL · 30° · HACCP · DGUV 112-191 · ESD · micro

❷ **CE, EN ISO 20345 - S1, SRC**

• size 35-48 • upper material **microfibre**
• breathable and moisture-absorbing microfibre inner lining • replaceable Active Comfort inlay (Art. 352520)
• anti-slip TPU-tread

S1 · STEEL · 30° · DGUV 112-191 · ESD · micro

❸ **CE, EN ISO 20345 - S1, SRC**

• size 35-48 • upper material **velours with breathable textile inserts** • replaceable Active Comfort inlay (Art. 352520) • anti-slip TPU-tread

S1 · STEEL · DGUV 112-191 · ESD

❹ **CE, EN ISO 20345 - S1 / S2 / S3, SRC**

• size 35-48 • upper material **functional leather in honeycomb design** • water-repellent • scratch-proof
• replaceable Active Comfort inlay (Art. 352520)
• metal-free, penetration resistant midsole in S3 models • anti-slip TPU-tread

STEEL · DGUV 112-191 · ESD



❶ **CE, EN ISO 20345 - S2 / S3, SRC**

• size 35-48 • upper material **knitted textile** • protection from splashes • replaceable Active Comfort inlay (Art. 352520) • anti-slip TPU-tread

❷ **CE, EN ISO 20345 - S2, SRC** micro

• size 35-48 • upper material **microfibre** • replaceable Active Comfort inlay (Art. 352520) • anti-slip TPU-tread

❸ **CE, EN ISO 20345 - S3, SRC**

• size 35-48 • upper material **microfibre textile** • water-repellent • replaceable Active Comfort inlay (Art. 352520) • metal-free, penetration resistant midsole • anti-slip TPU-tread

❶



1772 S2

31772 S2, ESD



1773 S2



31773 S2, ESD



31775 S2, ESD



1676 S3



31676 S3, ESD

❷



1781

31781 ESD



1780



31780 ESD

❸




1629

31629 ESD



1628



31628 ESD

uni6 safety shoes also available as occupational shoes

abeba

PROPERTIES

FIT - normal

BUSINESS



❶



33230 ESD

❷



33240 ESD

❶ + ❷ CE, EN ISO 20345 - S2, SRA

- size 36-48 • upper material **smooth leather**
- breathable and moisture-absorbing microfibre inner lining
- anti-slip ESD-compliant rubber tread

S2 STEEL ESD

abeba

FOOD TRAX

PROPERTIES

FIT - normal

Models with cold protection technology, see page 100

LACES

Set suitable for all laced shoes (Art. 370118/ 370110), further information on page 105

INLAY

Replaceable inlay (Art. 352800), further information on page 105

Orthopaedic inlays possible

TREAD PU

SRC slip resistance

PRT Flex technology
improves comfort and ergonomics, sole adapts to the anatomical movements of the foot

Shock absorber technology
reduces the occurrence of micro-damage, reduces the strain on joints and prevents posture damage and injuries

PRO TENDON technology
offers reinforced protection of the Achilles heel, stabilises the ankle

ANA-TECH technology
Wider heel area

Anti-static



FOOD TRAX

❶



5012856 ESD Size 36-51



5010856 ESD Size 36-51

❷



5010858 ESD Size 36-50



5012858 ESD Size 36-50

❸



5012860 ESD Size 36-51



5010860 ESD Size 36-50

❶+❷+❸ CE, EN ISO 20345 - S3, P, A, E, CI, FO, SRC

• upper material **smooth leather** • inner lining textile • replaceable, antibacterial inlay (Art. 352800) • metal-free • metal-free penetration protection • anti-slip PU-tread

S3 · COMP · METAL FREE · HACCP · DGUV 112-191 · ESD

❶+❷ **CE, EN ISO 20345 - S3, P, A, E, CI, FO, SRC**

• upper material **smooth leather** • inner lining textile • replaceable, antibacterial inlay (Art. 352800) • metal-free • metal-free penetration protection
• anti-slip PU-tread

❸ **CE, EN ISO 20345 - S3, P, A, E, CI, FO, SRC**

• upper material **smooth leather** • inner lining textile • replaceable, antibacterial inlay (Art. 352800) • waterproof zip • metal-free penetration protection
• anti-slip PU-tread

❶



5012857 ESD Size 36-51

5010857 ESD Size 36-50

❷



5010859 ESD Size 36-50

5012859 ESD Size 36-50

❸



5012861 ESD Size 36-50

5010861 ESD Size 36-50



C°LD
PROTECTION

❶



5012874 ESD Size 38-50



5010874 ESD Size 38-50

❷



5010866 ESD Size 38-48



5012866 ESD Size 38-48

❸



5012865 ESD Size 38-50



5010865 ESD Size 38-50

❶+ ❸ **CE, EN ISO 20345 - S3, P, A, E, CI, FO, SRC**

• upper material **smooth leather** • inner lining textile • replaceable, antibacterial inlay (Art. 352800) • metal-free • **cold protection technology**
• metal-free penetration protection • anti-slip PU-tread

S3 · COMP · METAL FREE · HACCP · DGUV 112-191 · ESD

❷ **CE, EN ISO 20345 - S3, P, A, E, CI, FO, SRC**

• upper material **smooth leather** • inner lining textile • replaceable, antibacterial inlay (Art. 352800) • Waterproof zip • **cold protection technology**
• metal-free penetration protection • anti-slip PU-tread

S3 · COMP · HACCP · DGUV 112-191 · ESD



C°LD
PROTECTION

Cold protection technology

The cold protection technology ensures that the wearer's foot is insulated against very low temperatures, down to -25°C. Guarantees thermal comfort when working in cold rooms, cold stores and in winter weather conditions. The unique, durable thermal protection system we have developed is a structural / technological / material composition created in collaboration with our technology partners.

In terms of materials, this technology consists of heat-insulating elements in the upper (use of the technological material Thinsulate) and a special blend of materials in the sole. The Thinsulate used is a unique microfibre technology that ensures the highest thermal performance with the lowest weight and thickness. The material is waterproof and breathable at the same time. It is durable and hypoallergenic.



abeba

BASIC

PROPERTIES

FIT - normal

LACES

Set suitable for all laced shoes (Art. 370118/ 370110), further information on page 105

TREAD PU

SRC slip resistance

PRT Flex technology
improves comfort and ergonomics, sole adapts to the anatomical movements of the foot

Shock absorber technology
reduces the occurrence of micro-damage, reduces the strain on joints and prevents posture damage and injuries





❶ **212364** Size 36-47



❷ **212367** Size 36-47



❸ **212432** Size 36-47



❹ **212171** Size 36-48

❶ + ❷ + ❸ CE, EN ISO 20345 - S2, A, E, CI, WRU, FO, SRC

- upper material **microfibre** - easy to clean - metal-free
- replaceable inlay - anti-slip PU-tread


S2 · COMP · METAL FREE · 30°

❹ CE, EN ISO 20345 - S2, A, E, CI, WRU, FO, SRC

- upper material **microfibre** - easy to clean - replaceable inlay
- anti-slip PU-tread

S2 · STEEL · 30°

INLAYS

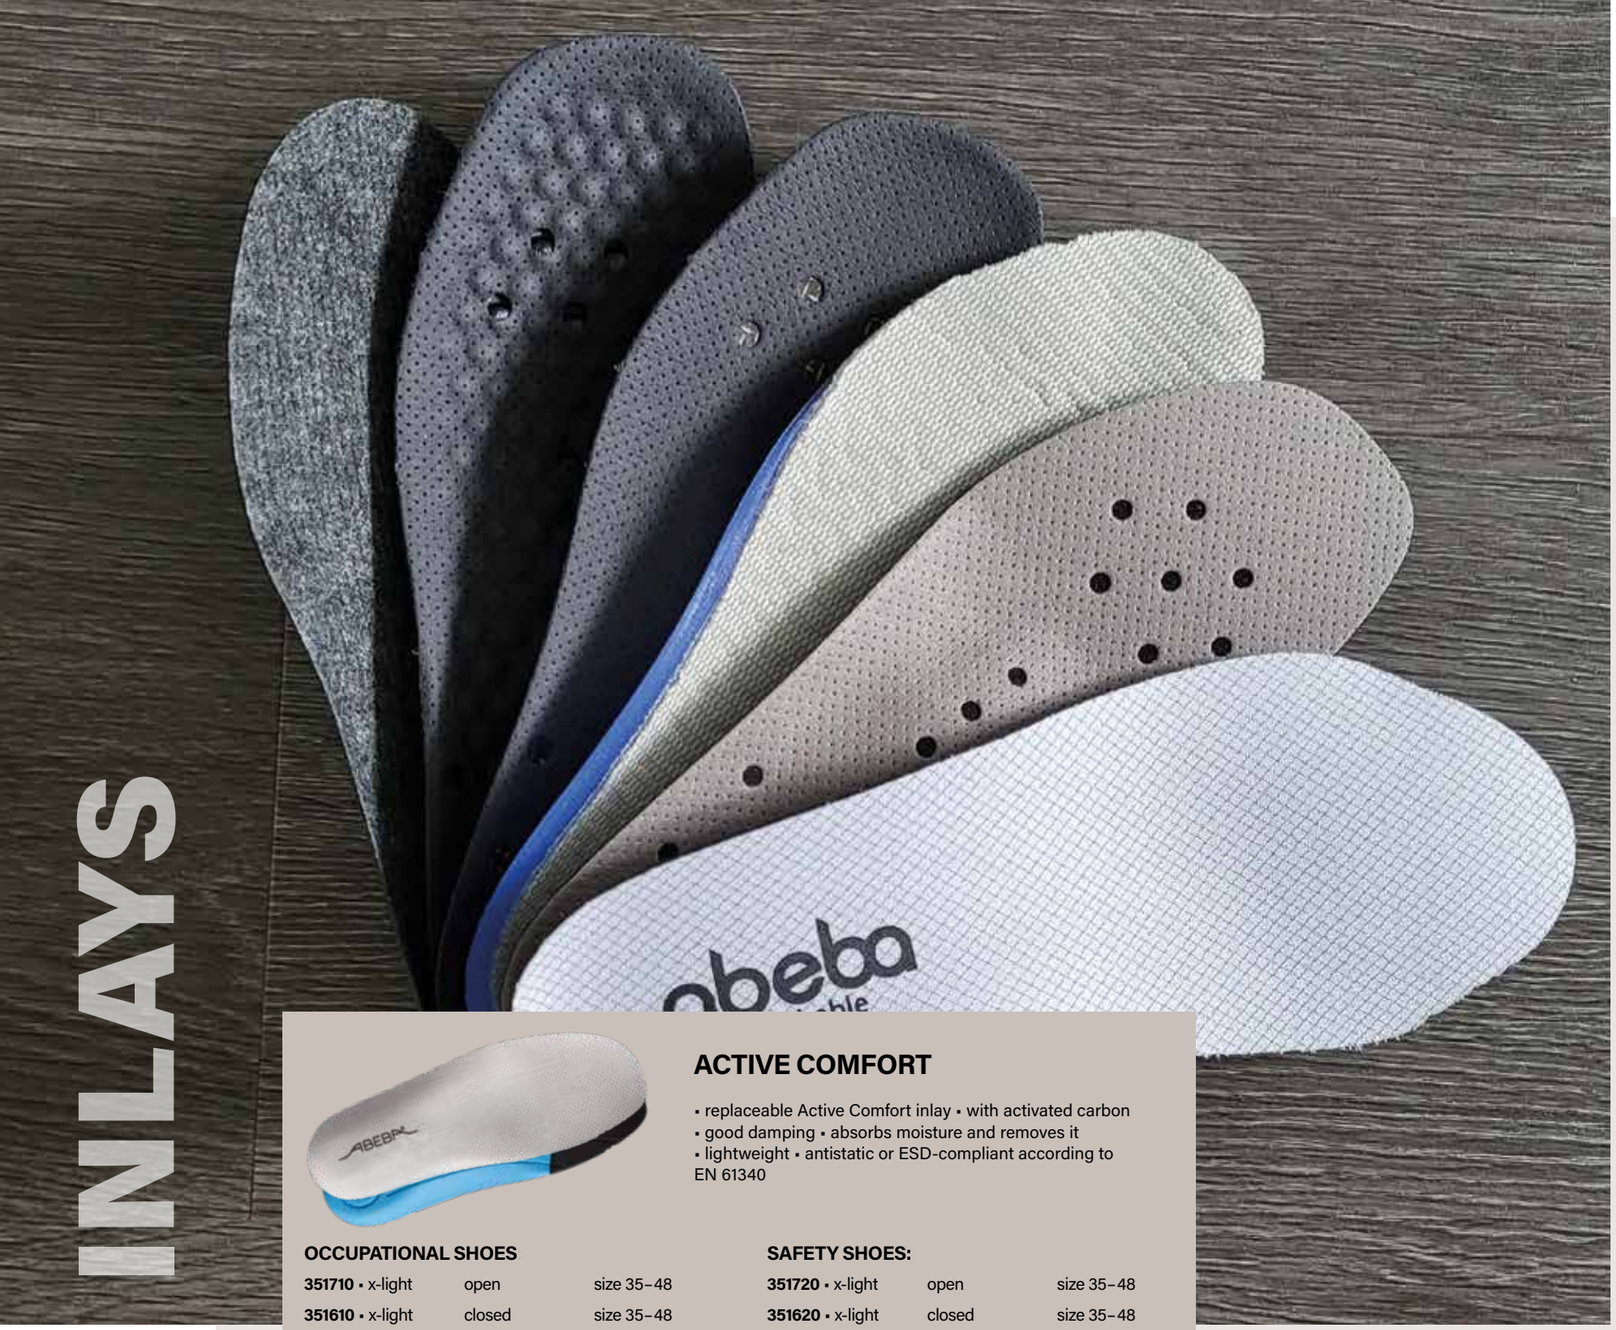

ACTIVE COMFORT

- replaceable Active Comfort inlay • with activated carbon
- good damping • absorbs moisture and removes it
- lightweight • antistatic or ESD-compliant according to EN 61340

OCCUPATIONAL SHOES

351710 • x-light	open	size 35–48
351610 • x-light	closed	size 35–48
352610 • Dynamic		size 35–48
352710 • easy		size 35–48
352510 • uni6		size 35–48

SAFETY SHOES:

351720 • x-light	open	size 35–48
351620 • x-light	closed	size 35–48
352520 • uni6		size 35–48
352420 • anatom	open	size 36–52
352320 • anatom	closed	size 36–52

AIR CUSHION



3551 - air cushion Size 35-47

- replaceable inlay for shoes with air padded tread
- antistatic or ESD-compliant according to EN 61340

REFLEXOR® MASSAGE



3565 • Reflexor®	anthracite	size 36–42
3566 • Reflexor®	anthracite	size 40–46
3572 • Reflexor® Comfort	anthracite	size 36–43

- replaceable "Reflexor®" Massage activated footbed • stimulates and promotes circulation
- orthopaedic bed • comfortable studded footbed • antistatic or ESD-compliant according to EN 61340

REFLEXOR®



- replaceable, microfibre-based Reflexor footbed • smooth
- antistatic or ESD-compliant according to EN 61340

LADIES

3568 • Reflexor® anthracite size 36–42



MEN

3570 • Reflexor® anthracite size 40–46

Food Trax



352800 - Food Trax Size 35-51

- replaceable inlay • with activated carbon • breathable
- good damping • shock absorbing

ACC WAVE



3553 - Static Control Size 36-47

- replaceable acc Wave inlay (air clima comfort) • protects muscles, ligaments, joints and the spine • full surface active damping • climate controlling and comfortable
- antistatic or ESD-compliant according to EN 61340

LACES SET

- Set consisting of 3 colours (red, blue and green)

370118	Laced shoe	Shoelace length
370110	Boots	Shoelace length



SEARCH REGISTER

Art. No.	Page	Size	Series	Model description	Standard	Labelling	Inlay	Category
1000	71	36 - 46	CLASSIC	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	-	Safety shoes
1001	71	36 - 46	CLASSIC	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	-	Safety shoes
1010	71	36 - 46	CLASSIC	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	-	Safety shoes
1011	71	36 - 46	CLASSIC	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	-	Safety shoes
1500	71	36 - 46	CLASSIC	Shoe	CE, EN ISO 20345	S2, SRC	-	Safety shoes
1628	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
1629	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
1676	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
1740	88	35 - 48	UNI6	Loafer	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
1741	88	35 - 48	UNI6	Loafer	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
1760	88	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S1, SRC	352520	Safety shoes
1761	88	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
1765	88	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
1772	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
1773	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
1780	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
1781	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
2120	82	36 - 52	ANATOM	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	352420	Safety shoes
2125	82	36 - 52	ANATOM	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	352420	Safety shoes
2130	82	36 - 52	ANATOM	Loafer	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
2131	82	36 - 50	ANATOM	Laced shoe	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
2135	82	36 - 52	ANATOM	Loafer	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
2136	82	36 - 50	ANATOM	Laced shoe	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
2172	85	36 - 50	ANATOM	Boot	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
2370	47	35 - 47	AIR CUSHION	Loafer	CE, EN ISO 20347	O1, SRA	-	Occupational shoes
2600	47	35 - 47	AIR CUSHION	Laced shoe	CE, EN ISO 20347	O2, SRA	3551	Occupational shoes
2610	47	35 - 47	AIR CUSHION	Laced shoe	CE, EN ISO 20347	O2, SRA	3551	Occupational shoes
2616	83	36 - 50	ANATOM	Sandals, hook-and-loop fastener	CE, EN ISO 20345	S1, SRC	352320	Safety shoes
2626	83	36 - 52	ANATOM	Laced shoe	CE, EN ISO 20345	S1, SRC	352320	Safety shoes
3000	55	34 - 42	BUSINESS	Service shoe			-	Occupational shoes
3030	55	36 - 42	BUSINESS	Service shoe	CE, EN ISO 20347	O1, FO, SRB	-	Occupational shoes
3620	67	35 - 47	CLEANROOM	Cleanroom boots	CE, EN ISO 20347	OB, A, E, SRA	-	Occupational shoes
3900	67	36 - 48	CLEANROOM	Gaiter			-	Occupational shoes
3910	67	36 - 48	CLEANROOM	Gaiter			-	Occupational shoes
4040	42	34 - 48	NATURE	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4045	42	34 - 48	NATURE	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4050	42	34 - 48	NATURE	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4055	42	34 - 48	NATURE	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4080	42	34 - 48	NATURE	Mules	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4085	42	34 - 48	NATURE	Mules	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4086	43	34 - 48	NATURE	Mules	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4090	43	34 - 48	NATURE	Sandals	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
4096	43	34 - 48	NATURE	Sandals	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
5100	37	36 - 47	RUBBER	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
5150	37	36 - 47	RUBBER	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
5200	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
5250	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
5300	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
5310	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
5700	64	40 - 46	REFLEXOR	Laced shoe	CE, EN ISO 20347	O1, SRB	3566/ 3570	Occupational shoes
5710	64	40 - 46	REFLEXOR	Laced shoe	CE, EN ISO 20347	O1, SRB	3566/ 3570	Occupational shoes

Art. No.	Page	Size	Series	Model description	Standard	Labelling	Inlay	Category
6728	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6729	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6741	52	35 - 48	UNI6	Loafer	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6750	50	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6760	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O1, FO, SRC	352510	Occupational shoes
6761	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6772	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6773	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6774	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6775	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6776	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6780	50	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6781	50	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
6903	64	36 - 42	REFLEXOR	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, SRB	3565/ 3568	Occupational shoes
7090	25	35 - 43	THE ORIGINAL	Clogs, flexible heel strap	CE, EN ISO 20347	OB, FO, SRC	-	Occupational shoes
7091	25	35 - 43	THE ORIGINAL	Clogs, flexible heel strap	CE, EN ISO 20347	OB, FO, SRC	-	Occupational shoes
7310	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7312	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7313	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7315	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7320	29	35 - 43	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7326	29	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7328	29	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7329	29	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7331	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7332	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7335	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7341	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7345	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7360	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7361	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
7521	25	36 - 42	THE ORIGINAL PLUS	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
8040	42	34 - 48	NATURE	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
8045	42	34 - 48	NATURE	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
9100	37	36 - 47	RUBBER	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, SR, FO	-	Occupational shoes
9110	37	36 - 47	RUBBER	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
9150	37	36 - 47	RUBBER	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, SR, FO	-	Occupational shoes
9200	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, SR, FO	-	Occupational shoes
9250	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, SR, FO	-	Occupational shoes
9252	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
9300	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, SR, FO	-	Occupational shoes
9310	37	36 - 47	RUBBER	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRC	-	Occupational shoes
9600	45	35 - 46	AUTOCLAVE SAFE	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
9610	45	35 - 46	AUTOCLAVE SAFE	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
9620	45	35 - 46	AUTOCLAVE SAFE	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
9630	45	35 - 46	AUTOCLAVE SAFE	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
31000	71	36 - 46	CLASSIC	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	-	Safety shoes
31010	71	36 - 46	CLASSIC	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	-	Safety shoes
31011	71	36 - 46	CLASSIC	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	-	Safety shoes
31092	64	36 - 42	REFLEXOR	Mules	ESD-compliant		-	Occupational shoes
31392	85	36 - 47	STATIC CONTROL	Loafer	CE, EN ISO 20345	S2, SRA	3553	Safety shoes

SEARCH REGISTER

Art. No.	Page	Size	Series	Model description	Standard	Labelling	Inlay	Category
31628	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
31629	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
31676	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
31721	88	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S1, SRC	352520	Safety shoes
31740	88	35 - 48	UNI6	Loafer	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31741	88	35 - 48	UNI6	Loafer	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31760	88	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S1, SRC	352520	Safety shoes
31761	88	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31765	88	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S3, SRC	352520	Safety shoes
31772	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31773	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31775	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31780	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31781	91	35 - 48	UNI6	Laced shoe	CE, EN ISO 20345	S2, SRC	352520	Safety shoes
31795	88	35 - 48	UNI6	Sandals	CE, EN ISO 20345	S1, SRC	352520	Safety shoes
32120	82	36 - 52	ANATOM	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	352420	Safety shoes
32125	82	36 - 52	ANATOM	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	352420	Safety shoes
32130	82	36 - 52	ANATOM	Loafer	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
32131	82	36 - 50	ANATOM	Laced shoe	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
32135	82	36 - 52	ANATOM	Loafer	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
32136	82	36 - 50	ANATOM	Laced shoe	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
32140	84	36 - 48	ANATOM	Shoe, hook-and-loop	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
32147	84	36 - 50	ANATOM	Laced shoe	CE, EN ISO 20345	S1, SRC	352320	Safety shoes
32172	85	36 - 50	ANATOM	Boot	CE, EN ISO 20345	S2, SRC	352320	Safety shoes
32189	83	36 - 52	ANATOM	Sandals	CE, EN ISO 20345	S1, SRC	352320	Safety shoes
32256	84	36 - 52	ANATOM	Laced shoe	CE, EN ISO 20345	S3, SRC	352320	Safety shoes
32268	85	36 - 52	ANATOM	Boot	CE, EN ISO 20345	S3, SRC	352320	Safety shoes
32300	47	35 - 47	AIR CUSHION	Slip-ons, perforated	CE, EN ISO 20347	O1, SRA	3551	Occupational shoes
32310	47	39 - 47	AIR CUSHION	Slip-ons, perforated	CE, EN ISO 20347	O1, SRA	3551	Occupational shoes
32370	47	35 - 47	AIR CUSHION	Loafer	CE, EN ISO 20347	O1, SRA	-	Occupational shoes
32450	55	40 - 47	BUSINESS	Laced shoe	CE, EN ISO 20347	O1, SRB	-	Occupational shoes
32600	47	35 - 47	AIR CUSHION	Laced shoe	CE, EN ISO 20347	O2, SRA	3551	Occupational shoes
32610	47	35 - 47	AIR CUSHION	Laced shoe	CE, EN ISO 20347	O2, SRA	3551	Occupational shoes
33230	93	36 - 48	BUSINESS	Laced shoe	CE, EN ISO 20345	S2, SRA	-	Safety shoes
33240	93	36 - 48	BUSINESS	Laced shoe	CE, EN ISO 20345	S2, SRA	-	Safety shoes
35600	39	36 - 47	ARROW	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRA	-	Occupational shoes
35710	64	40 - 46	REFLEXOR	Laced shoe	CE, EN ISO 20347	O1, SRB	3566/ 3570	Occupational shoes
36721	50	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O1, FO, SRC	352510	Occupational shoes
36728	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36729	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36740	52	35 - 48	UNI6	Loafer	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36741	52	35 - 48	UNI6	Loafer	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36750	50	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36760	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O1, FO, SRC	352510	Occupational shoes
36761	51	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36772	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36773	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36774	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36775	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36776	52	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36780	50	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes

Art. No.	Page	Size	Series	Model description	Standard	Labelling	Inlay	Category
36781	50	35 - 48	UNI6	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	352510	Occupational shoes
36813	65	36 - 43	REFLEXOR COMFORT	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, SRB	3572	Occupational shoes
36872	65	36 - 43	REFLEXOR COMFORT	Sandals	CE, EN ISO 20347	OB, A, E, SRB	3572	Occupational shoes
36902	64	36 - 42	REFLEXOR	Mules	CE, EN ISO 20347	OB, A, E, SRB	3565/ 3568	Occupational shoes
36912	64	36 - 42	REFLEXOR	Mules	CE, EN ISO 20347	OB, A, E, SRB	3565/ 3568	Occupational shoes
37310	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37312	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37313	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37315	28	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37320	29	35 - 43	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37326	29	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37328	29	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37329	29	35 - 48	DYNAMIC	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37331	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37332	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37335	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37341	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37343	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37345	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37360	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37361	30	35 - 48	DYNAMIC	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	352610	Occupational shoes
37520	25	36 - 42	THE ORIGINAL PLUS	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
38200	39	36 - 47	ARROW	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRA	-	Occupational shoes
38210	39	36 - 47	ARROW	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRA	-	Occupational shoes
38330	39	36 - 47	ARROW	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, FO, SRA	-	Occupational shoes
38600	39	35 - 46	ARROW	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, FO, SRA	-	Occupational shoes
39600	45	35 - 46	AUTOCLAVE SAFE	Clog	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
39610	45	35 - 46	AUTOCLAVE SAFE	Clog	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
39620	45	35 - 46	AUTOCLAVE SAFE	Clog	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
39630	45	35 - 46	AUTOCLAVE SAFE	Clog	CE, EN ISO 20347	OB, A, E, SRC	-	Occupational shoes
85080	23	36 - 43	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
85081	23	36 - 43	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87020	23	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87021	23	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87030	23	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87031	23	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87050	23	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87080	23	36 - 43	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87081	23	36 - 43	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87208	23	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87209	23	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87620	33	35 - 43	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87621	33	35 - 43	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87622	33	35 - 48	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87630	33	35 - 48	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
87631	33	35 - 48	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
212171	103	36 - 48	BASIC	Shoe	CE, EN ISO 20345	S2, A, E, CI, WRU, FO, SRC	-	Safety shoes
212432	103	36 - 47	BASIC	Shoe	CE, EN ISO 20345	S2, A, E, CI, WRU, FO, SRC	-	Safety shoes
212367	103	36 - 47	BASIC	Laced shoe	CE, EN ISO 20345	S2, A, E, CI, WRU, FO, SRC	-	Safety shoes
212364	103	36 - 47	BASIC	Boot	CE, EN ISO 20345	S2, A, E, CI, WRU, FO, SRC	-	Safety shoes
370110	105	100 cm		Laces set				Occupational shoes

SEARCH REGISTER

Art. No.	Page	Size	Series	Model description	Standard	Labelling	Inlay	Category
370118	105	80 cm		Laces set				Occupational shoes
711026	77	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711027	77	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711028	74	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711029	74	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711030	74	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
711031	74	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20345	S1, SRC	351620	Safety shoes
711032	77	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711033	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711035	74	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
711036	74	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20345	S1, SRC	351620	Safety shoes
711037	77	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711038	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711041	74	35 - 48	X-LIGHT	Clogs, flexible heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
711042	74	35 - 48	X-LIGHT	Clogs, flexible heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
711047	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
711126	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
711127	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
711130	58	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20347	OB, FO, SRC	351710	Occupational shoes
711131	61	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20347	O1, FO, SRC	351610	Occupational shoes
711132	58	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
711133	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
711135	58	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20347	OB, FO, SRC	351710	Occupational shoes
711137	58	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
711138	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
810019	20	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
810020	21	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
812018	20	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
812020	21	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
814018	20	36 - 43	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
824018	20	36 - 43	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
824020	21	36 - 43	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
837620	33	35 - 43	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
837621	33	35 - 43	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
837622	33	35 - 48	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
837630	33	35 - 48	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
837631	33	35 - 48	EASY 2.0	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
845018	20	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
845020	21	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
877020	22	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
877021	22	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
877030	22	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
877031	22	36 - 48	ACTIVE	Clog	CE, EN ISO 20347	OB, A, E, FO, SRC	-	Occupational shoes
5010856	97	36 - 51	FOOD TRAX	Laced shoe	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5010857	98	36 - 50	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5010858	97	36 - 50	FOOD TRAX	Shoe, hook-and-loop	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5010859	98	36 - 50	FOOD TRAX	Boot, hook-and-loop	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5010860	97	36 - 50	FOOD TRAX	Loafer	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5010861	98	36 - 50	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5010865	100	38 - 50	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5010866	100	38 - 48	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes

Art. No.	Page	Size	Series	Model description	Standard	Labelling	Inlay	Category
5010874	100	38 - 50	FOOD TRAX	Boot, hook-and-loop	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012856	97	36 - 51	FOOD TRAX	Laced shoe	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012857	98	36 - 51	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012858	97	36 - 50	FOOD TRAX	Shoe, hook-and-loop	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012859	98	36 - 50	FOOD TRAX	Boot, hook-and-loop	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012860	97	36 - 51	FOOD TRAX	Loafer	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012861	98	36 - 50	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012865	100	38 - 50	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012866	100	38 - 48	FOOD TRAX	Boot	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
5012874	100	38 - 50	FOOD TRAX	Boot, hook-and-loop	CE, EN ISO 20345	S3, P, A, E, CI, FO, SRC	352800	Safety shoes
7131020	76	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20345	S1, SRC	351620	Safety shoes
7131026	77	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131027	77	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131028	74	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131029	74	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131030	74	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
7131031	74	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20345	S1, SRC	351620	Safety shoes
7131032	77	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131033	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131035	74	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
7131036	74	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20345	S1, SRC	351620	Safety shoes
7131037	77	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131038	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131041	74	35 - 48	X-LIGHT	Clogs, flexible heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
7131042	74	35 - 48	X-LIGHT	Clogs, flexible heel strap	CE, EN ISO 20345	SB, A, E, FO, SRC	351720	Safety shoes
7131047	78	35 - 48	X-LIGHT	Shoe, hook-and-loop	CE, EN ISO 20345	S2, SRC	351620	Safety shoes
7131056	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S1, SRC	351620	Safety shoes
7131058	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S1, SRC	351620	Safety shoes
7131126	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
7131127	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
7131130	58	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	351710	Occupational shoes
7131131	61	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20347	O1, FO, SRC	351610	Occupational shoes
7131132	58	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
7131133	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
7131135	58	35 - 48	X-LIGHT	Clogs, fixed heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	351710	Occupational shoes
7131136	61	35 - 48	X-LIGHT	Sandals, hook-and-loop fastener	CE, EN ISO 20347	O1, FO, SRC	351610	Occupational shoes
7131137	58	35 - 48	X-LIGHT	Loafer	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
7131138	61	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20347	O2, FO, SRC	351610	Occupational shoes
7131141	58	35 - 48	X-LIGHT	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	351710	Occupational shoes
7131142	58	35 - 48	X-LIGHT	Clogs, flexible heel strap	CE, EN ISO 20347	OB, A, E, FO, SRC	351710	Occupational shoes
7131860	76	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S3, SRC	351620	Safety shoes
7131874	78	35 - 48	X-LIGHT	Laced shoe	CE, EN ISO 20345	S3, SRC	351620	Safety shoes

All inlays can be found on page 104/105

Kontaktujte nás

CENTRÁLA
Predajňa / Sklad
Vajnorská 131/A,
Bratislava 831 04





tel.: 02/44458685
tel/fax: 02/44458684
e-mail: lubica@lubica.eu
web: www.lubica.sk



Otváracie hodiny

Pondelok	8:00 - 17:00
Utorok	8:00 - 17:00
Streda	8:00 - 17:00
Štvrtok	8:00 - 17:00
Piatok	8:00 - 15:00
Sobota	Zatvorené
Nedeľa	Zatvorené

ľubica® work & safety

Viac informácií o produktoch **nájdete na www.lubica.sk**

cover © ĽUBICA, s.r.o.